

2001 Annual Air Quality Monitoring Report for the Wellington Region

**Prepared by:
Perry Davy
Air Quality Scientist
Resource Investigations
November 2001**

Publication No. WRC\RINV-T-01/63

Contents

	Page
Executive Summary	I
1. Introduction	1
2. Air Quality Monitoring	2
2.1 Monitoring Strategy	2
2.2 Air Pollutants Monitored	3
2.2.1 Nitrogen Oxides (NO _x)	3
2.2.2 Particulate Matter (PM ₁₀)	3
2.2.3 Carbon Monoxide (CO)	4
2.3 Ambient Air Quality Guidelines	5
3. Air Quality Monitoring Technical Details	8
3.1 Mobile Ambient Air Quality Monitoring Station	8
3.2 Permanent Monitoring Station - Birch Lane, Lower Hutt	8
3.3 Monitoring Instruments	9
3.3.1 Nitrogen Oxides (NO _x)	9
3.3.2 Particulate Matter (PM ₁₀)	9
3.3.3 Carbon Monoxide (CO)	9
3.3.4 Meteorological Parameters	9
3.3.5 Data Acquisition	10
3.3.6 Quality Assurance	10
3.3 PM ₁₀ High Volume Sampler	10
3.3.1 Quality Assurance	11
4. Monitoring Results	12
4.1 Trentham Fire Station, Upper Hutt	12
4.1.1 Site Description	12
4.1.2 Nitrogen Dioxide (NO ₂)	15
4.1.3 Particulate Matter (PM ₁₀)	18
4.1.4 Carbon Monoxide (CO)	21

4.2	Birch Lane, Lower Hutt	24
4.2.1	Site Description	24
4.2.2	Nitrogen Dioxide (NO ₂)	27
4.2.3	Particulate Matter (PM ₁₀)	29
4.2.4	Carbon Monoxide (CO)	31
4.3	Wainuiomata PM ₁₀ Monitoring	34
4.3.1	Site Description	34
4.3.2	Monitoring Results for PM ₁₀ at Wainuiomata	36
4.3.3	Analysis of PM ₁₀ Monitoring Results	37
5.	Conclusion	39
	References	41
	Appendix 1	42
	Appendix 2	43

Executive Summary

The Annual Air Quality Monitoring Report 2001 presents the results of ambient air quality monitoring that has been carried out in the Wellington Region during the year ending 30 September 2001. Ambient air quality monitoring was undertaken at Upper Hutt, Lower Hutt and Wainuiomata.

The contaminants that have been monitored in the Wellington Region over the past year include fine particulate matter (PM₁₀), carbon monoxide (CO), and nitrogen dioxide (NO₂). These pollutants are known to adversely affect human health and well-being, as well as to have other adverse environmental effects. Air quality monitoring has focused on these pollutants as they are discharged to the atmosphere in the greatest quantities from a variety of sources.

Figure 1 provides a graphical illustration of the ambient air quality monitoring results compared with air quality guidelines intended to protect human health.

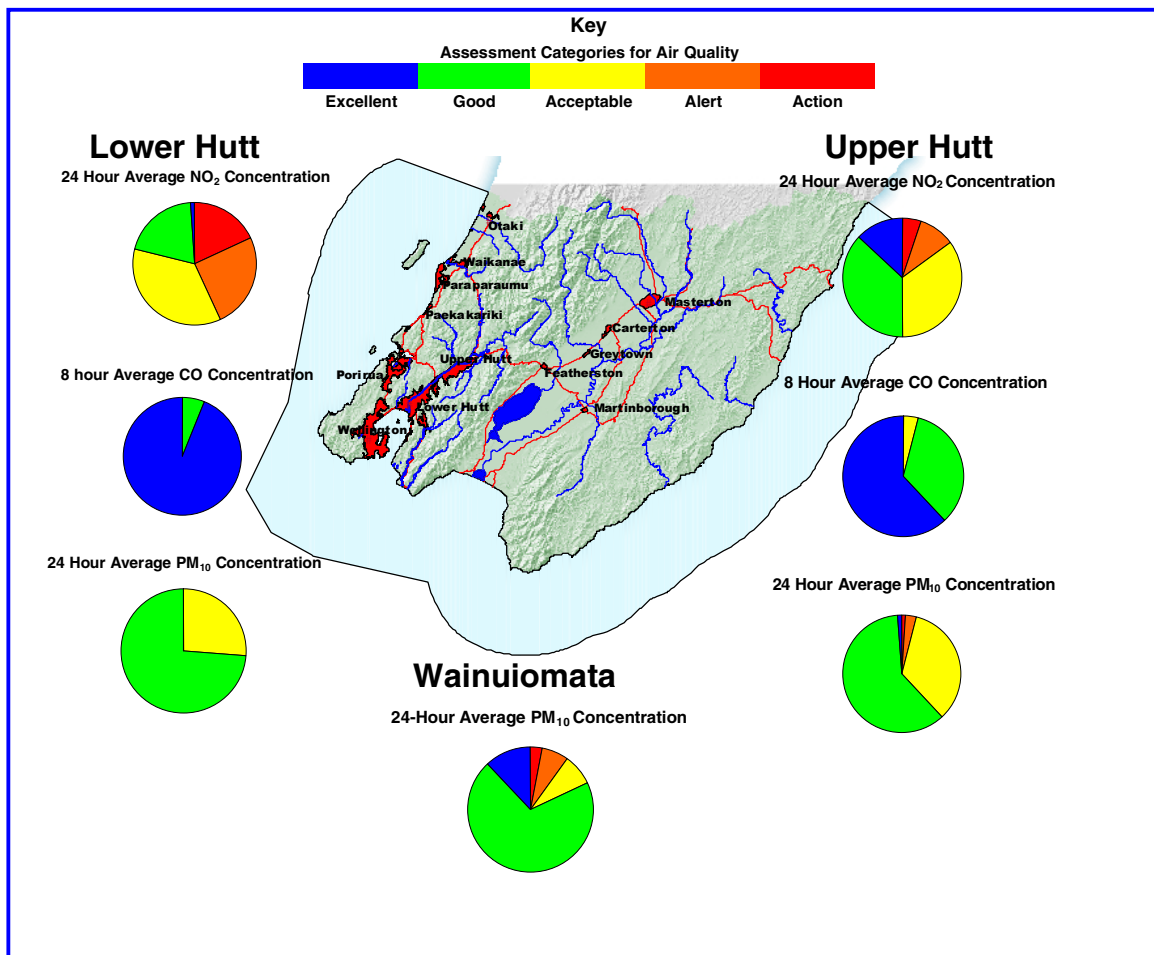


Figure 1 Air Quality Monitoring Results for the Wellington Region

Upper Hutt

A mobile ambient air quality monitoring station has been located at Trentham Fire Station in Upper Hutt since June 2000. The entire period from June 2000 through to October 2001 has been reported in this document to allow for comparisons between the winters of 2000 and 2001. The monitoring data confirms that the Upper Hutt area is susceptible to wintertime pollution episodes.

There were four exceedences of the proposed new National Air Quality Guideline for particulate matter during the last winter and two exceedences during the previous (2000) winter. Carbon monoxide and nitrogen dioxide concentrations were also found to be higher during the winter. It is suspected that domestic fires are the main cause of the particulate pollution and a combination of motor vehicles and domestic fires are responsible for the elevated levels of carbon monoxide and nitrogen dioxide. Further research is being undertaken to establish the predominant pollution sources in Upper Hutt.

Lower Hutt

The Council's first permanent ambient air quality monitoring station was commissioned at Birch Lane in Lower Hutt in February 2001. This is the first in a network of air quality monitoring stations intended for the Wellington Region. Monitoring results for the period from February 2001 through to October 2001 have been reported in this document.

The results indicate that nitrogen dioxide levels are elevated during the winter in Lower Hutt, this is likely to result from motor vehicle emissions and combustion emissions from residential and commercial heating, combined with cold calm winter conditions. Peak levels of air pollutants in Lower Hutt occurred at similar times as those recorded at Upper Hutt, mainly due to the meteorological conditions that predominated at the time.

Wainuiomata

Particulate matter (PM₁₀) was monitored at Wainuiomata Bowling Club from September 2000 through to October 2001. Fine particulate concentrations exceeded the proposed National ambient air quality guideline on three occasions during the past winter. The breaches of the guideline occurred during the same period as those exceedences experienced in Upper Hutt, that is, during cold calm weather conditions when dispersion of air pollutants is poor.

The Wellington Regional Council used the Wainuiomata site as part of an air pollution screening programme for the Wellington Region. Wainuiomata had been suspected of having the meteorological conditions conducive to pollution events. The use of solid fuel fires for domestic heating is suspected as the main source of air pollution in Wainuiomata.

Conclusion

The results of the ambient air quality monitoring carried out in the Wellington Region over the past year have indicated that the highest concentrations of air pollutants occurred during the winter. The reasons for the higher winter time air pollution levels are periods of cold, calm weather when pollutant concentrations increase in the local air mass rather than being

dispersed, coupled with a greater quantity of emissions to atmosphere from combustion sources used for residential and commercial heating.

Ambient air quality monitoring at various locations within the Wellington Region has produced results that show air quality is generally acceptable at the locations that were monitored. However, at times, some locations experience periods of degraded air quality.

The health risk to the local population from the air quality guideline exceedences needs to be explored in greater depth along with management options for improving air quality where it is degraded. To this end the Wellington Regional Council is in the process of setting up a permanent air quality monitoring network so that it can determine trends in local air pollution and determine the likely risks to human and environmental health.

1. Introduction

This Annual Air Quality Monitoring Report 2001 reports on all ambient air quality monitoring that has been carried out in the Wellington Region for the year ending 30 September 2001. Ambient air quality is the general quality of the air that surrounds us. Ambient air quality reflects the cumulative effects of discharges to the atmosphere from both human activities and natural sources.

The Wellington Regional Council (the Council) has the responsibility to monitor the state of the environment pursuant to section 35 of the Resource Management Act 1991. Part of this responsibility includes monitoring ambient air quality.

The Regional Air Quality Management Plan requires the collection of information on particular aspects of air quality so that the effectiveness and appropriateness of policies, objectives and rules can be assessed.

The cumulative effects of emissions from domestic fires, motor vehicles and certain industrial production processes can be evaluated by monitoring the ambient concentrations of key air pollutants. We need information regarding such pollutants to make any management decisions necessary to maintain and enhance air quality within the Region

The Regional Air Quality Management Plan contains Regional Ambient Air Quality Guidelines (see Table 2.1). Air quality within the Wellington Region needs to be monitored in order to assess whether these guidelines are being met. It is important to note that these guideline levels are intended only for the protection of human health based on current medical and scientific knowledge and may not provide adequate protection for the wider environment, such as sensitive ecosystems.

In developing its last long term financial strategy the Council provided funding for continued expansion of its air quality monitoring network. This funding provided for the establishment of:

- i) an air quality monitoring station in Lower Hutt in 2000/01;
- ii) a meteorological monitoring station in Masterton in 2001/02; and
- iii) an air quality monitoring station in Masterton in 2002/03.

During 2000/2001 an air quality screening survey was undertaken at Upper Hutt. Monitoring of particulate matter (fine dust) was also undertaken at a site in the Wainuiomata basin.

The Wellington Regional Council has now established its first permanent air quality monitoring station at a site in Lower Hutt. The monitoring station will monitor ambient air quality in order to assess trends in air pollution levels and the health of the air for the population of the Lower Hutt Valley.

2. Air Quality Monitoring

2.1 Monitoring Strategy

Ambient air quality monitoring is necessary for assessing many of the issues identified in the Regional Policy Statement and the Regional Air Quality Management Plan. In particular, the relative concentrations of various air pollutants have adverse effects on human health and amenity values.

There is insufficient information and data available to fully characterise the state of ambient air quality (for state of the environment reporting) in the Wellington Region. This was one of the issues identified in the Region's State of the Environment Report "*Measuring Up*" (Wellington Regional Council 1999). A series of air quality screening investigations was undertaken from 1997-2001 in order to prioritise potential sites for permanent air quality monitoring stations. These investigations have identified areas where air quality is, or can intermittently become, degraded to the extent that it may affect human health. It is in these areas that permanent ambient air quality monitoring will be undertaken.

Permanent monitoring stations are required to assess trends in air quality and the state of the resource. At least three years continuous data is necessary before any trends become evident and useful comparisons can be made between sites.

The Wellington Region is divided into a series of airsheds, delineated by valleys in between steep hills or mountains. This produces unique microclimates and meteorological conditions for each of these sub-regional airsheds. Each location has differing pressures on the air quality resource and the resultant effects on air quality cannot be inferred from one site to another. The main airsheds that have been identified as subject to air quality pressures are Wellington City, Lower Hutt Valley, Upper Hutt Valley, Wairarapa Valley, Porirua, Kapiti Coast, Karori and Wainuiomata.

The *Wellington Regional Air Quality Monitoring Strategy 2000-2005* (Resource Investigations Technical Publication WRC/RINV-T-00-20 June 2000) identifies the sites where permanent monitoring stations are appropriate and where further screening investigations need to be undertaken.

The Wellington Regional Council has now established its first permanent air quality monitoring station at a site in Lower Hutt. The monitoring station will monitor background air quality to assess trends in air pollution levels and the overall quality of the air in the Lower Hutt Valley.

Compliance monitoring of specific sources of air pollutants in specific areas forms part of a separate programme. A monitoring strategy for the Petone/Seaview area has been developed for this purpose, the *Petone-Seaview Ambient Air Quality Monitoring Strategy 2001-2003* (Resource Investigations Technical Publication WRC/RINV-T-01-40 September 2001).

2.2 Air Pollutants Monitored

The contaminants that are being monitored in the Wellington Region are particulate matter (PM₁₀), carbon monoxide (CO) and nitrogen oxides (NO_x). These air pollutants are several of the contaminants identified in the Regional Ambient Air Quality Guidelines (reproduced as Table 2.1), the *National Ambient Air Quality Guidelines* (Ministry for the Environment 1994) and in *Proposals for Revised an New Ambient Air Quality Guidelines for New Zealand* (Ministry for the Environment 2000).

CO, NO_x and PM₁₀ are national State of the Environment Indicators for air quality. These contaminants have been monitored as they are emitted in the greatest concentrations from a variety of sources throughout the Wellington Region. They were chosen as they are known to affect human health and well-being adversely, and to have other adverse environmental effects.

2.2.1 Nitrogen Oxides (NO_x)

Nitrogen oxides principally consist of nitric oxide (NO) and nitrogen dioxide (NO₂). NO and NO₂ are have the potential to cause adverse human health effects and NO₂ contributes to poor visibility. Both compounds form acidic species when in aqueous solution (hence they are a component of acid rain) and can attack the human body's mucous membranes and the respiratory system. Nitrogen dioxide forms a brown gas in the atmosphere and can be seen as a haze over cities during periods of calm weather and heavy traffic congestion (e.g. during *rush hours*).

Sources include:

- Motor vehicles
- Domestic fires
- Industrial combustion processes.

NO₂ is not usually discharged from these sources in significant concentrations, but is more likely to form in the atmosphere by chemical transformation of NO. For the purposes of this report, the monitoring station was considered to be sufficient distance away from major local NO_x sources for the formation of NO₂ to be representative of general ambient NO₂ concentrations. Only NO₂ has been reported in this document.

2.2.2 Particulate Matter (PM₁₀)

PM₁₀ is that portion of particulate matter with an aerodynamic cross-section less than 10 micrometers. This fine particulate matter is small enough to enter the smaller more vulnerable passages of the respiratory system. The health effects associated with inhalation of fine particulate matter established from epidemiological studies overseas have prompted recent reviews of air quality standards in the UK and Europe. These countries have reduced their PM₁₀ standard to 50 µg/m³ (24-hour average) as a result.

Environment Canterbury and Auckland Regional Council have also adopted a 50 $\mu\text{g}/\text{m}^3$ (24-hour average) PM_{10} concentration as their regional guideline. The current National Guidelines are also under review and it is likely that the present PM_{10} guideline of 120 $\mu\text{g}/\text{m}^3$ (24-hour average) will be reduced to 50 $\mu\text{g}/\text{m}^3$ (24-hour average).

An ambient air quality guideline for $\text{PM}_{2.5}$ of 25 $\mu\text{g}/\text{m}^3$ (24-hour average) has also been recommended under the national air quality guideline review. $\text{PM}_{2.5}$ is that portion of particulate matter with an effective aerodynamic cross-section less than 2.5 micrometers. Recent medical research suggests that $\text{PM}_{2.5}$ may be a better indicator of potential adverse human health effects. By definition $\text{PM}_{2.5}$ is a subset of PM_{10} .

PM_{10} is associated with the following issues in the Wellington Region:

- Adverse human health effects
- Winter time “smog” events
- Reduction in atmospheric visibility (haze)
- Dust nuisance

Sources of PM_{10} include:

- Domestic fires
- Industrial combustion processes
- Motor vehicles
- Quarrying activities
- Natural sources such as sea salt and soil particles

Densely populated residential areas, solid fuel heating appliances, adverse meteorological conditions (inversions), and the dispersion limiting effect of topography can all combine to produce high ambient concentrations of particulate.

The ambient air quality monitoring results for PM_{10} at the various sites within the Wellington Region have been assessed in this report using the new recommended guideline of 50 $\mu\text{g}/\text{m}^3$.

2.2.3 Carbon Monoxide (CO)

Carbon monoxide is principally a concern because of its potential to replace oxygen molecules in haemoglobin resulting in adverse health effects. CO is produced from the following sources:

- Domestic fires
- Industrial combustion sources
- Motor vehicles

Wellington’s main shopping areas are along streets that suffer from traffic congestion. The combination of traffic emissions, complex topography (i.e. streets enclosed by tall buildings) and adverse meteorological conditions, such as evening

inversions in the winter, can result in carbon monoxide concentrations rising to levels that may endanger public health.

High carbon monoxide concentrations have also been measured in built up residential areas and, in this case, are usually the result of emissions from motor vehicles and/or domestic fires.

2.3 Ambient Air Quality Guidelines

Regional Ambient Air Quality Guidelines are reproduced in Table 2.1. The Regional Guidelines are based on National Ambient Air Quality Guidelines (Ministry for the Environment 1994).

The National Guidelines and the Regional Maximum Acceptable Level (MAL) Guidelines are recommended only as minimum standards of air quality to protect public health. The guidelines were developed from World Health Organisation Standards and international epidemiological research. They are not maximum permissible concentrations of pollutants in air or limits that can be polluted 'up to' safely (Ministry for the Environment 1994).

The National Guidelines are currently under review and it is likely that the guideline concentrations for some contaminants (for example PM₁₀) will be reduced in response to the results of recent research overseas on the health effects of the various criteria pollutants.

The Maximum Desirable Level (MDL) is defined as the level that will provide maximum protection to the environment (including soil, water, flora, fauna, structures, and amenity values), taking into account existing air quality, community expectations, economic implications, and the purpose and principles of the Resource Management Act 1991. Desirable levels are appropriate guidelines or targets in rural or residential areas, and in other areas where good air quality is considered a priority.

The MDL's set in the Regional Ambient Air Quality Guidelines are based on Canadian and World Health Organisation Standards. These guidelines include a factor for the protection of sensitive flora and fauna (ecosystems) as well as human health.

Table 2.1 Regional and National Air Quality Guidelines

Indicator	Maximum Desirable Level (Regional)	Maximum Acceptable Level (Regional /National)	Averaging Times	Techniques for Measurement	
Particulates PM ₁₀	70 µg/m ³	120 (50) µg/m ³	24 hours	AS3580.9.6-1990	
	40 µg/m ³	40 µg/m ³	Annual	AS3580.9.7-1990	
PM _{2.5}		25 µg/m³	24 hours	US 40 CFR Part50	
Carbon Monoxide	6 mg/m ³	30 mg/m ³	1 hour	AS3580.7.1-1992	
		10 mg/m ³	8 hours	AS3580.7.1-1992	
Lead		0.5-1 (0.5) µg/m ³	3 months	AS2800-1985	
Nitrogen Dioxide	95 µg/m ³	300 (200) µg/m ³	1 hour	AS3580.5.1-1995	
	30 µg/m ³	100 µg/m ³	24 hours		
Fluoride	Special Land Use				
		1.8 µg/m ³	12 hours	AS3580.1.13.1-1993	
		1.5 µg/m ³	24 hours	AS3580.13.2-1991	
		0.8 µg/m ³	7 days		
		0.4 µg/m ³	30 days		
		0.25 µg/m ³	90 days		
	General Land Use				
		1.8 µg/m ³	3.7 µg/m ³	12 hours	AS3580.13.1-1993
		1.5 µg/m ³	2.9 µg/m ³	24 hours	AS3580.13.2-1991
		0.8 µg/m ³	1.7 µg/m ³	7 days	
		0.4 µg/m ³	0.84 µg/m ³	30 days	
		0.25 µg/m ³	0.5 µg/m ³	90 days	
	Conservation Areas				
			0.1 µg/m ³	90 days	
	Hydrogen Sulphide	1 µg/m ³	7 µg/m ³	30 minutes	AS3580.8.1-1990
Ozone	100 µg/m ³	150 µg/m ³	1 hour	AS3580.5.1-1993	
		100 µg/m ³	8 hours		
Sulphur Dioxide		500 µg/m ³	10 minutes	AS3580.8.1-1990	
		350 µg/m ³	1 hour		
		125 µg/m ³	24 hours		
		50 µg/m ³	Annual		

µg - micrograms
 mg - milligrams
 AS - Australian Standard

The figures in bold in Table 2.1 are the changes made to the National Air Quality Guidelines as recommended by the recent review.

A useful method to illustrate the significance of ambient air quality monitoring results is to depict the percentage of time that the monitoring results fall into certain categories. This method is described by the Ministry for the Environment in the discussion document on Environmental Performance Indicators (Ministry for the Environment, October 1997). Table 2.2 provides a description of these categories.

Table 2.2 Air Quality Categories

Category	Maximum Measured Value	Comment
Action	Exceeds Guideline	Completely unacceptable by national and international standards.
Alert	Between 66% and 100% of the guideline	A warning level which can lead to guidelines being exceeded if trends are not curbed.
Acceptable	Between 33% and 66% of the guideline	A broad category, where maximum values might be of concern in some sensitive locations, but are generally at a level that does not warrant dramatic action.
Good	Between 10% and 33% of the guideline	Peak measurements in this range are unlikely to affect air quality.
Excellent	Less than 10% of the guideline	Of little concern.

The main intention of the air quality categories is to present the results of ambient monitoring in a manner that assists in setting goals for air quality management. This report compares the results obtained from the ambient air quality monitoring with the air quality categories in Table 2.2.

3. Air Quality Monitoring Technical Details

3.1 Mobile Ambient Air Quality Monitoring Station

The mobile ambient air quality monitoring station is a small (1.8 x 1.8 x 2.4 m high) insulated and air-conditioned shed with a 6 metre meteorological mast and sampling ports. The air-conditioning is maintained at 23-24^oC. Figure 3.1 is a photograph of the monitoring station.



Figure 3.1 Air Quality Monitoring Station

3.2 Permanent Monitoring Station - Birch Lane, Lower Hutt

The Wellington Regional Council has now established its first permanent air quality monitoring station at Birch Lane in Lower Hutt. This monitoring station will monitor background air quality in order to assess trends in air pollution levels and the exposure risks for the population of the Lower Hutt Valley.

The Birch Lane monitoring station houses similar monitoring equipment to the mobile station and the instrumentation is included in the general description section 3.3. The only real difference is that the permanent station is a little larger and the

meteorological mast is 10 metres instead of six. Additional parameters monitored are solar radiation (global) and rainfall.

3.3 Monitoring Instruments

3.3.1 Nitrogen Oxides (NO_x)

Nitrogen oxides are continuously monitored using Advanced Pollution Instrumentation Limited M200A NO_x Chemiluminescence Analysers. The instruments have an internal zero air scrubber for zero checks and a NO₂ permeation tube (supplying *ca.* 500 ppb NO₂) for span checks. The sample inlet for the instrument is approximately 3 m above ground level in a rain protected outlet. All NO_x data is recorded as parts per billion (ppb).

Only the monitoring results for NO₂ have been assessed in this document, as NO₂ is included in the ambient air quality guidelines. NO is slowly converted to NO₂ in the atmosphere by oxidative processes.

3.3.2 Particulate Matter (PM₁₀)

PM₁₀ is continuously monitored with a Rupprecht & Patashnick Co. Ltd. TEOM Series 1400AB Ambient Particulate Monitor. The TEOM cap, case and air temperatures were set at 40 °C in line with national ambient air quality monitoring protocols. The TEOM PM₁₀ size selective inlet was 3 m above ground level. The instrument is set to record particulate matter concentrations as µg/m³ at 0°C and 1 atmosphere pressure.

3.3.3 Carbon Monoxide (CO)

Carbon monoxide is continuously monitored using an Advanced Pollution Instrumentation Limited M300 CO Gas Filter Correlation Infrared Analyser. The instrument has an internal zero air scrubber with a zero air supply for zero checks and a span gas for span checks. Span gas (40 ppm CO) is supplied using BOC Gases Limited β-Grade CO gas. The sample inlet for the instrument is approximately 3 m above ground level alongside the NO_x inlet. All CO data is recorded as parts per million (ppm).

3.3.4 Meteorological Parameters

A 6 m meteorological mast is attached to the mobile monitoring station and the Birch Lane station has an associated 10 m mast. Various meteorological parameters are monitored continuously. Wind speed, wind direction, relative humidity and temperature are all monitored at mast top. Temperature is also monitored at 1.5 m for atmospheric stability assessments. North or 0° for the wind direction indicator is aligned with true north.

3.3.5 Data Acquisition

The CO, NO_x and TEOM instruments were connected by a digital interface to an Iquest DS 4483 DOLogger datalogger. All logged data was stored as 10 minute averages. Data was downloaded to a central archive four times a day via a radio modem system.

3.3.6 Quality Assurance

The Wellington Regional Council Resource Information Section, which collects, checks and archives all the air quality data, is an ISO 9002 registered supplier. The methodologies used for collecting and archiving data, as well as the maintenance schedules and record sheets are all documented, as part of the ISO 9002 registered quality system. The air quality monitoring methods used by the Regional Council are either Australian Standard methods or (in the case of the TEOM) United States EPA designated methods. All maintenance and instrument inspections are carried out as per manufacturers' instructions and recommendations and/or to the appropriate Australian Standard.

All incoming data for the air quality monitoring stations was inspected on a daily basis to ensure that the monitoring instruments were operating within expected parameters. The monitoring station itself was visited at least once a week in order to carry out a diagnostics check on all instruments. At the same time zero and span checks were performed for the CO and NO_x analysers. Site visits and any operations carried out on the monitoring instruments were recorded in a site log book, which was kept at the monitoring station at all times. In addition, the zero and span checks were recorded on specially compiled check sheets along with the diagnostic parameters.

Zero and span calibrations are performed monthly, and three-monthly multipoint calibrations were carried out on the CO and NO_x instruments.

The data used in this report has been corrected for zero drift for CO and NO_x. For the purposes of analysis in this report, ppm CO has been converted to mg/m³ at 0°C and 101.3 kPa pressure (i.e. mg/m³ = 1.25 x ppm). NO₂ has been converted from ppb to µg/m³ at 0 °C and 101.3 kPa pressure (i.e. µg/m³ = 2.05 x ppb). All data manipulation and analyses in this report has been performed using Hilltop, a software package designed to store and provide analyses of time dependent data.

3.3 PM₁₀ High Volume Sampler

The high volume particulate sampling utilises a gravimetric method for monitoring PM₁₀. The instrument itself is a Lear Siegler Australasia Pty Limited Flow-Set High Volume Air Sampler. Ambient air is passed through a size selective inlet and then through a pre-weighed conditioned filter that is removed after 24 hours continuous sampling, conditioned and then reweighed. The results are expressed as the 24-hour average for that time period.

This ambient air quality monitoring method is an Australian and USEPA Standard method and the high volume sampler is operated accordingly. The instrument is currently operated on a one-day-in-four sampling basis. The high volume sampler was located at Wainuiomata Bowling Club from September 2000 through to October 2001.

3.3.1 Quality Assurance

The high volume sampler was calibrated on installation at Wainuiomata Bowling Club, then in February 2001 and again in August 2001 using an Orifice Calibration Plate as per AS 3580.9.6-1990. The calibration showed <3% drift in the flow rates. The reported data has been corrected for the calibrations.

4. Monitoring Results

4.1 Trentham Fire Station, Upper Hutt

4.1.1 Site Description

The monitoring station was located within the grounds of Trentham Fire Station, off Fergusson Road in Upper Hutt (Grid Reference E2681464; N6006446, elevation 40m). Figure 4.1 shows a map of the area and Figure 4.2 details the site layout.



Figure 4.1 Map Showing Location of Monitoring Site (●)

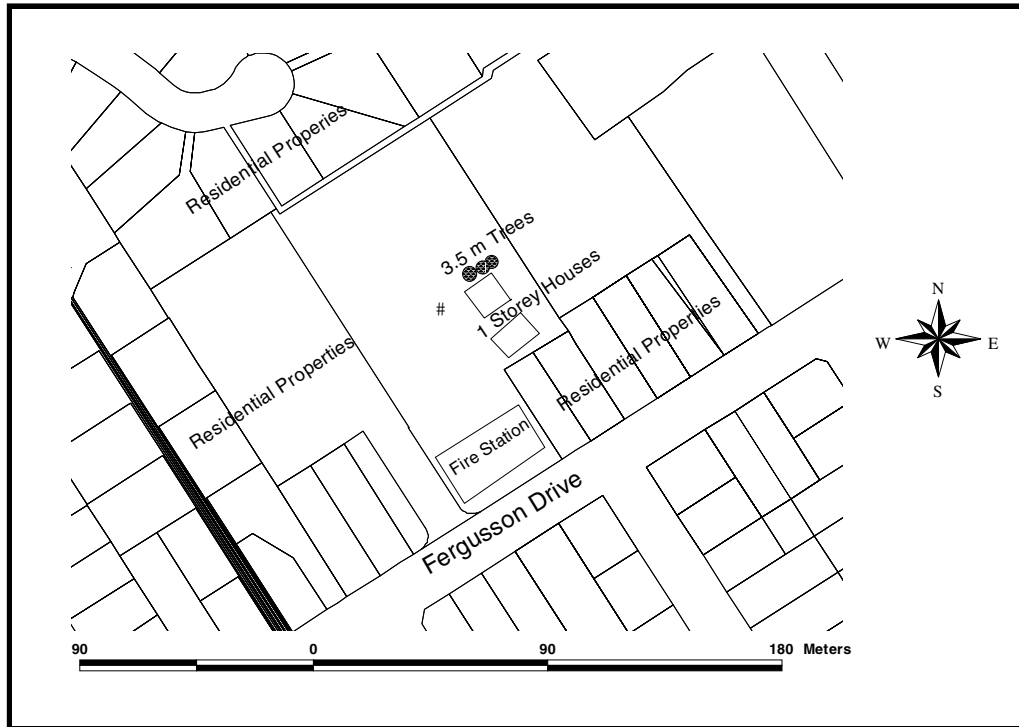


Figure 4.2 Monitoring Site (●) layout at Trentham Fire Station, Upper Hutt

The northern side of the monitoring station was up against a 2m fence and beyond that, approximately 20 m away, were two one-storey residential houses. 70m to the east was the one-storey high Trentham Fire Station. To the west were open fields and beyond that were residential properties. To the south of the monitoring station (30 metres) was a practice tower for fire drills and then beyond that were residential properties.

The land around the site at Trentham Fire Station was flat and surrounded by open space or residential buildings no more than 2 storeys high. The nearest large structure to the monitoring station was the practice tower, which was also two storeys high.

The Trentham Fire Station site is approximately 3 kilometres southwest from the central business district of Upper Hutt City. Upper Hutt City is located in the Hutt Valley 30km northeast of Central Wellington and has a population of about 37,000. Land use in the area is predominantly residential with some light industrial activities.

The main urban area lies in a valley basin surrounded by hills up to 500 metres high. The Hutt River flows in through the top end of Upper Hutt and out through Taita Gorge which forms a natural topographical constriction at the southern end of the Upper Hutt basin. At times the atmospheric dispersion of pollutants discharged from various activities in Upper Hutt is severely limited and can lead to a build up of pollutants. Figure 4.3 is an aerial view of Upper Hutt City with the hills and farmland on either side of the river valley.



Figure 4.3 Aerial View of Upper Hutt Urban Area and Monitoring Site (●)

The predominant wind directions are from the northerly and southerly quarters as shown by the wind rose in Appendix 1.

Table 4.1 contains summary statistics of guideline pollutants for the monitoring period. The Maximum Desirable Level (MDL) or the Maximum Acceptable Level (MAL) where an MDL has not been set is also indicated.

Table 4.1 Summary Statistics for Trentham Fire Station, Upper Hutt

Parameter	NO ₂ (µg/m ³)		PM ₁₀ (µg/m ³)	CO (mg/m ³)	
	1 Hour (MDL = 95)	24 Hour (MDL = 30)	24 Hour (MDL = 70 NAAQG = 50)	1 Hour (MAL = 30)	8 Hour (MDL = 6)
Maximum	106	46	61	9.4	4.8
99.9 Percentile	75	42	59	6.3	4.2
99.5 Percentile	58	40	53	4.9	3.5
75 Percentile	16	16	17	0.6	0.6
Mean	11	11	15	0.5	0.5
Median	8	10	13	0.3	0.3

4.1.2 Nitrogen Dioxide (NO₂)

1-Hour Moving Average

Figure 4.4 is a graph of the 1-hour moving average of NO₂ concentrations at Trentham Fire Station for the monitoring period. The 1-hour maximum acceptable level (MDL) of 95 µg/m³ for NO₂ is also shown. The 1-hour maximum acceptable level (MAL) of 300 µg/m³ for NO₂ is not shown for scaling clarity.

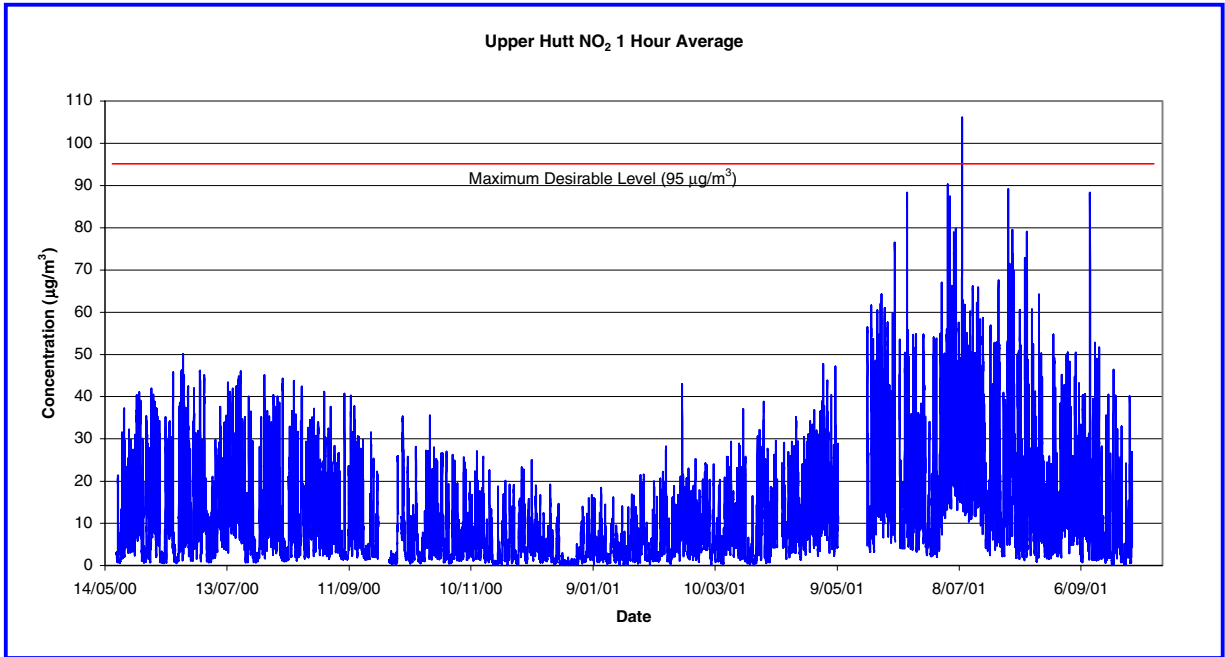


Figure 4.4 1-Hour Moving Average NO₂ (µg/m³) at Trentham Fire Station from 19/5/00 to 1/10/01

24-Hour Moving Average

Figure 4.5 is a graph of the 24-hour moving average of NO₂ concentrations at Trentham Fire Station for the monitoring period. The graph also indicates the maximum desirable level (MDL) of 30 µg/m³.

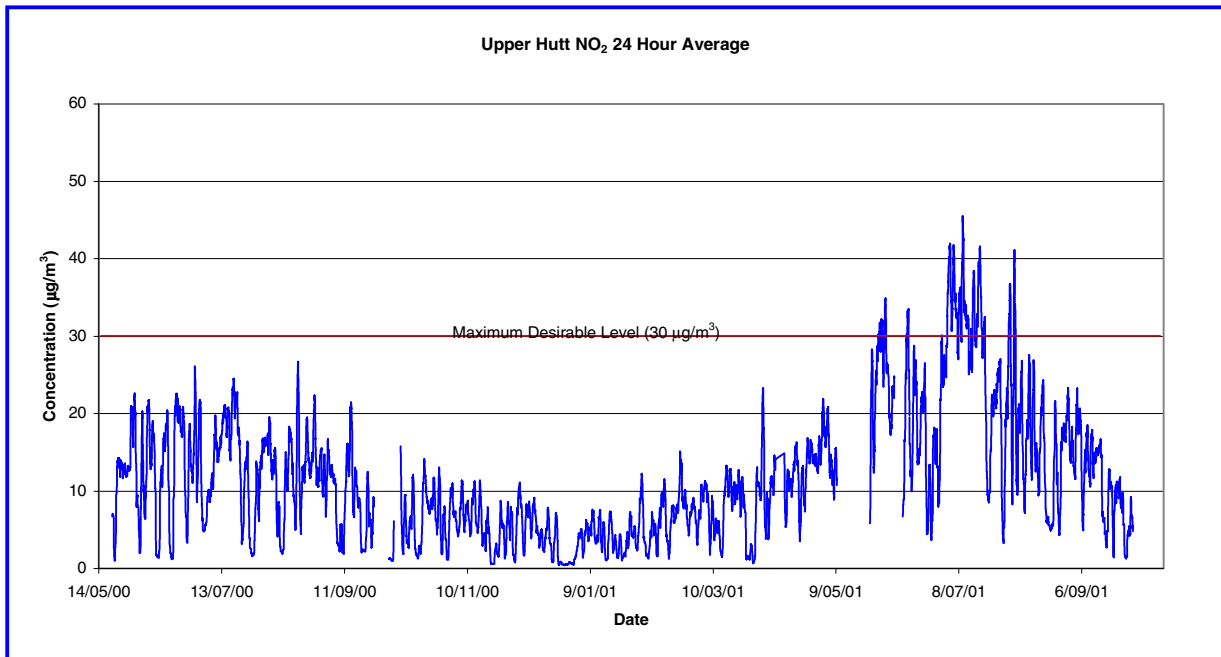


Figure 4.5 24-Hour Moving Average NO₂ (µg/m³) at Trentham Fire Station from 19/5/00 to 1/10/01

Analysis of NO₂ Monitoring Results

There was one exceedence of the NO₂ 1-hour MDL of 95 µg/m³ and twenty-two exceedences of the 24-hour MDL of 30 µg/m³ during the monitoring period. All exceedences occurred during the past winter (June - August 2001). This is likely due to a sustained period of cold weather during early July 2001 coupled with low wind speeds, ideal conditions for meteorological inversions that can limit the dispersion of air pollutants. Figure 4.6 illustrates the lower temperatures experienced during July 2001 as compared to July 2000.

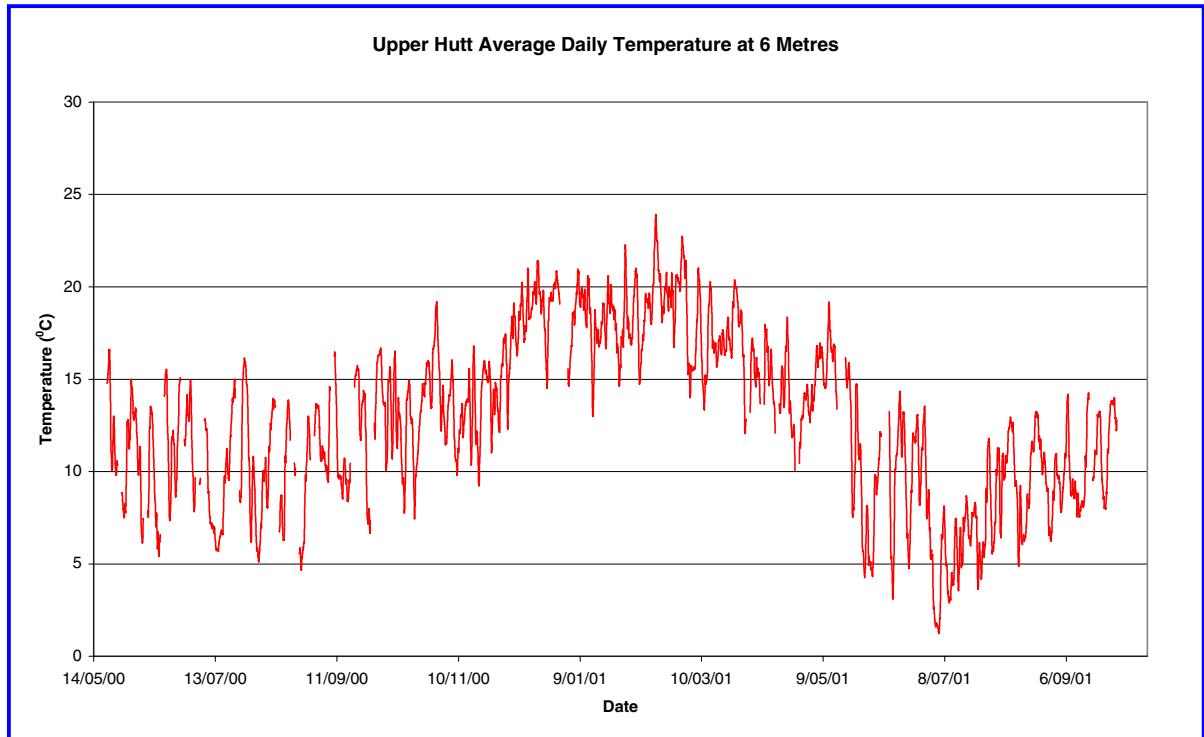


Figure 4.6 Average Daily Temperature at Upper Hutt

While ambient NO₂ concentrations tended to become elevated at the same times as PM₁₀ and CO, maximum measured levels only coincided with the maximums observed for CO. This suggests different sources of these pollutants with the common link being calm cold meteorological conditions resulting in poor atmospheric dispersion.

Closer analysis of the NO₂ data for Upper Hutt shows a diurnal pattern of peaks in NO₂ concentrations in the morning and again in the evening. This is likely to be as a result of motor vehicle emissions with heavier traffic in the morning and then again in the afternoon/evening associated with commuter 'rush hours'. There would also be some contribution to ambient NO₂ concentrations from domestic fires on winter evenings.

Data from the Wellington Regional Emissions Inventory indicates that motor vehicles are the major contributor to NO₂ emissions on a typical winter's day. Further source apportionment research in progress at Upper Hutt will help to resolve this.

Figure 4.7 provides a comparison of the monitoring results with the relative ambient air quality guidelines using the categories described in Table 2.2.

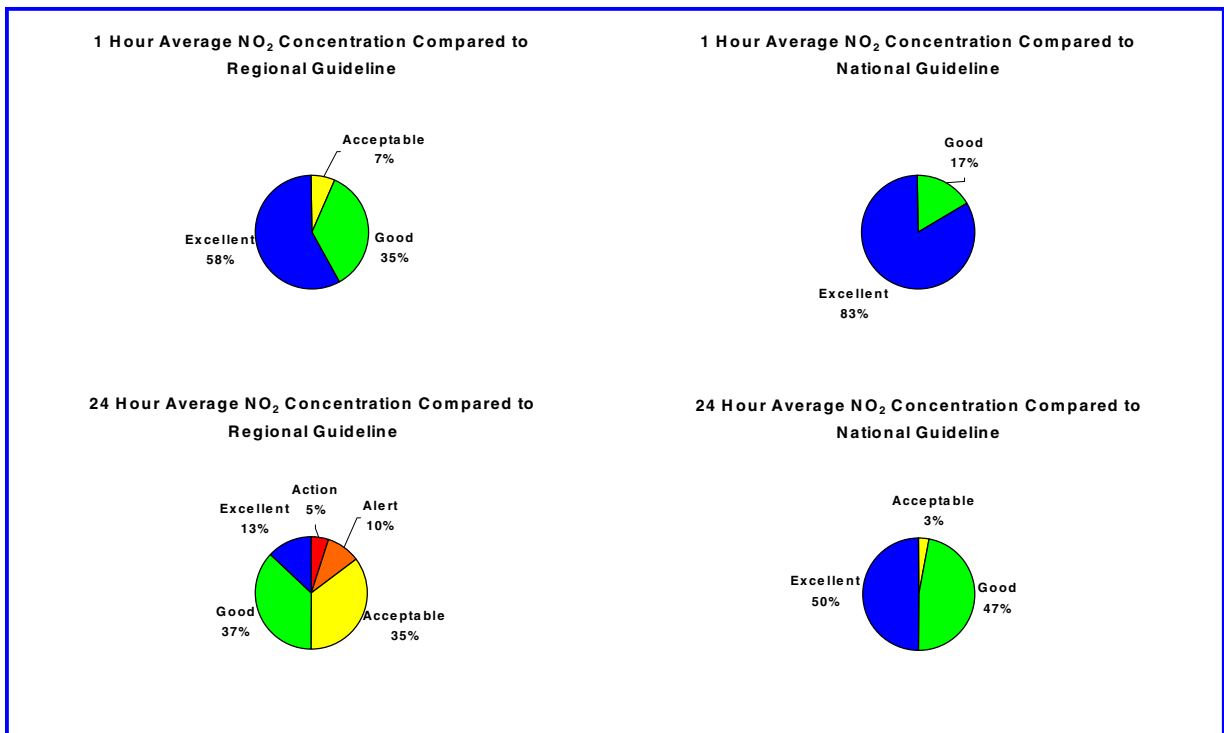


Figure 4.7 NO₂ Monitoring Results Compared to Air Quality Categories for the Period May 2000 to October 2001

Figure 4.7 indicates that the NO₂ monitoring results at Trentham Fire Station compare favourably with the proposed National Air Quality Guidelines. NO₂ levels became elevated during the winter, with ambient concentrations measured in the ‘Action’ category 5% of the time when compared to the 24-hour MDL, this equates to about 25 days on which the MDL was exceeded during the monitoring period.

The implication of the 24-hour MDL exceedence is that there may be some adverse effects for sensitive flora in the Upper Hutt area during the winter. The extent of such adverse effects is unclear at this point until research on the sensitivities of New Zealand plants to air pollution is carried out.

4.1.3 Particulate Matter (PM₁₀)

The TEOM PM₁₀ monitoring instrument required servicing in Australia and this resulted in a data gap between December 2000 and May 2001 as seen in Figures 4.8 and 4.9.

1 Hour Moving Average

Figure 4.8 is a graph of the 1-hour moving average of PM₁₀ concentrations at Trentham Fire Station for the monitoring period. There is no guideline value for 1-hour concentrations.

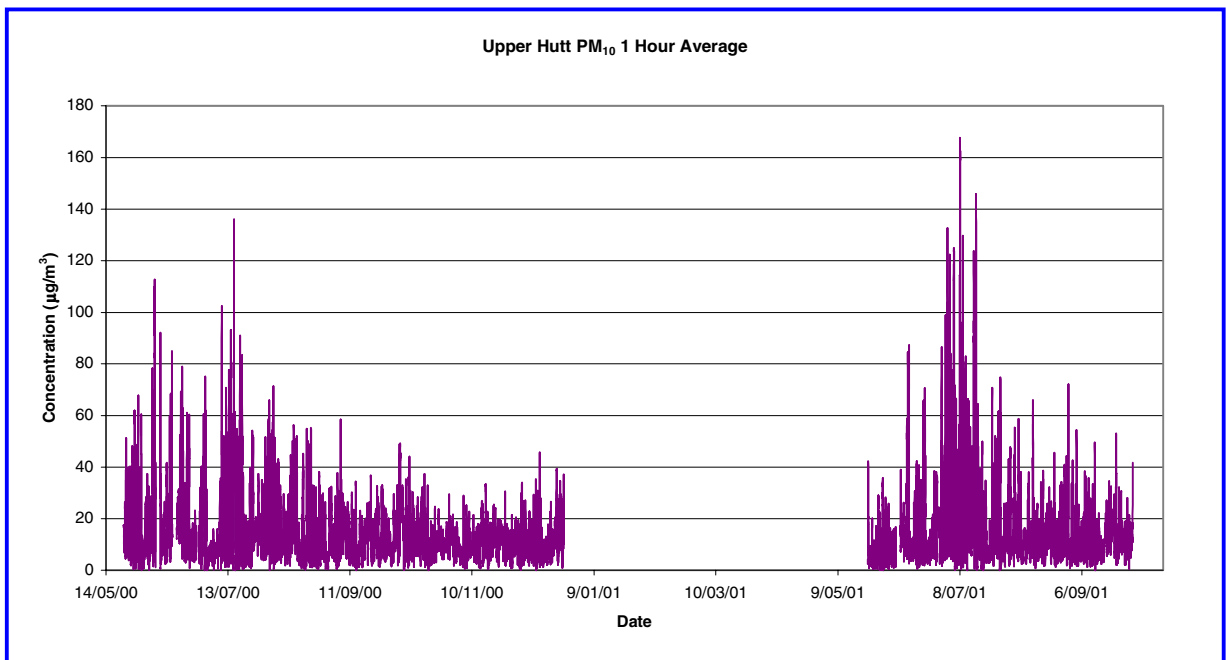


Figure 4.8 1 Hour Moving Average PM₁₀ (µg/m³) at Trentham Fire Station from 22/5/00 to 1/10/01

24-Hour Moving Average

Figure 4.9 is a graph of the 24-hour moving average of PM₁₀ concentrations at Trentham Fire Station for the monitoring period. The graph also indicates the 24-hour maximum acceptable level (MAL) of 120 µg/m³ and the maximum desirable level (MDL) of 70 µg/m³.

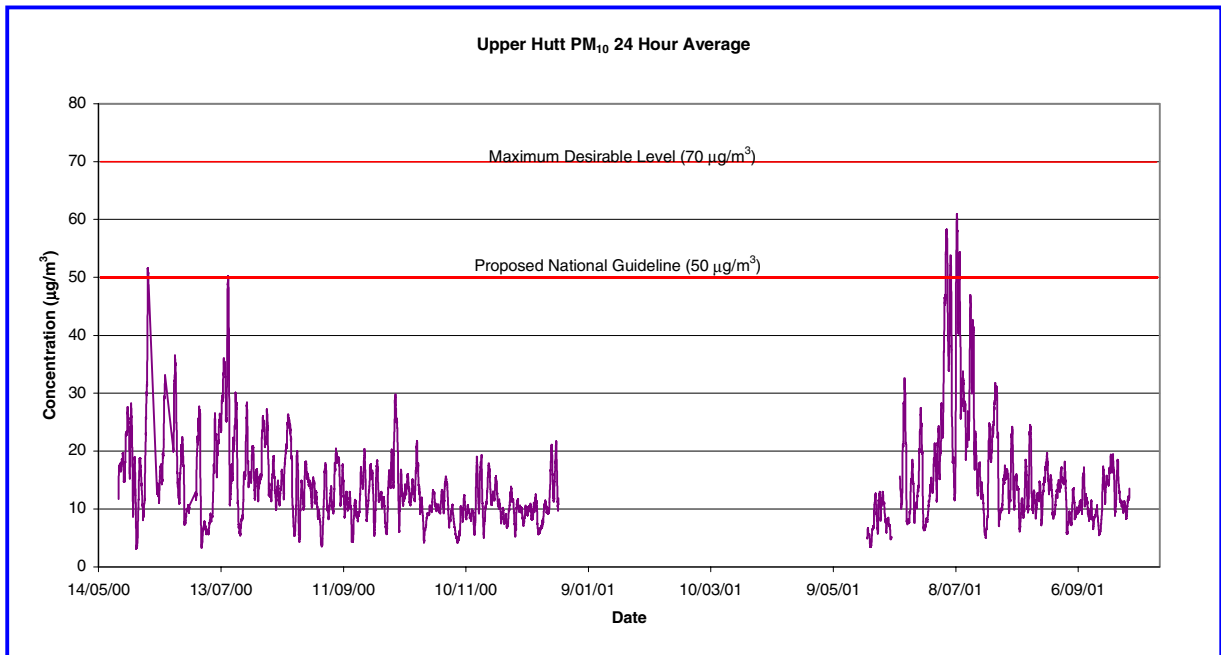


Figure 4.9 24-Hour Moving Average PM₁₀ (µg/m³) at Trentham Fire Station from 22/5/00 to 1/10/01

Analysis of PM₁₀ Monitoring Results

The highest 24-hour moving average concentrations for PM₁₀ at Upper Hutt were recorded in early July 2001. The peak PM₁₀ levels during the winter of 2001 were higher than those recorded for the previous winter. This is due to an extended period of cold, calm weather this winter.

The peaks in PM₁₀ are likely to be caused by smoke emissions from domestic solid fuel heating appliances. Further research has been undertaken to determine the relative contributions of each source category (such as domestic fires, motor vehicles and industry) to ambient particulate matter concentrations at Upper Hutt. The results of this work will be published at a later date.

Figure 4.10 shows of the monitoring results compared with the relevant ambient air quality guidelines using the air quality categories described in Table 2.2. The proposed new National Air Quality Guideline for PM₁₀ (50 µg/m³) was exceeded on six separate occasions overall including four occasions last winter.

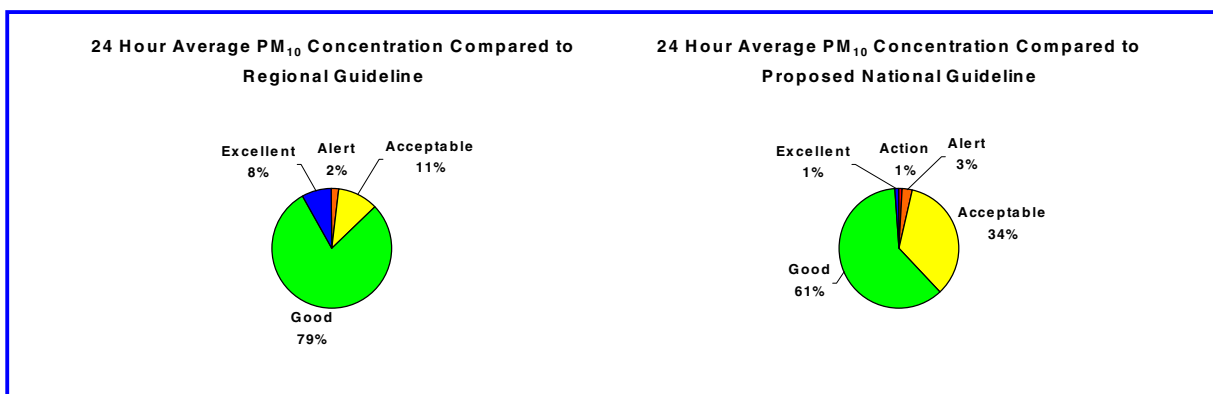


Figure 4.10 PM₁₀ Monitoring Results at Upper Hutt Compared to Air Quality Categories for the Period May 2000 to October 2001

The trend in ambient PM₁₀ concentrations throughout the monitoring period was similar to that of NO₂. There was a decrease in average concentrations as average temperatures and wind speeds increased over the spring.

Ambient air quality monitoring of PM₁₀ at Upper Hutt reached concentrations that may be of concern to human health based on recent epidemiological research. There were no exceedences of the MDL and 6 exceedences of the proposed National Guideline of 50 µg/m³. The problem occurs mainly during winter when cold, calm weather conditions prevail and there is widespread use of solid fuel fires for domestic heating. Ambient air quality in Upper Hutt should be monitored on a permanent basis as it may be necessary to introduce air quality management strategies to reduce the winter time peaks in particulate matter in order to protect public health.

4.1.4 Carbon Monoxide (CO)

A fault with the CO monitor resulted in missing and invalid data between December 2000 and February 2001.

1-Hour Moving Average

Figure 4.11 is a graph of the 1-hour moving average of CO concentrations at Trentham Fire Station for the monitoring period. The 1-hour maximum acceptable level (MAL) of 30 mg/m³ for CO is not shown for scaling clarity.

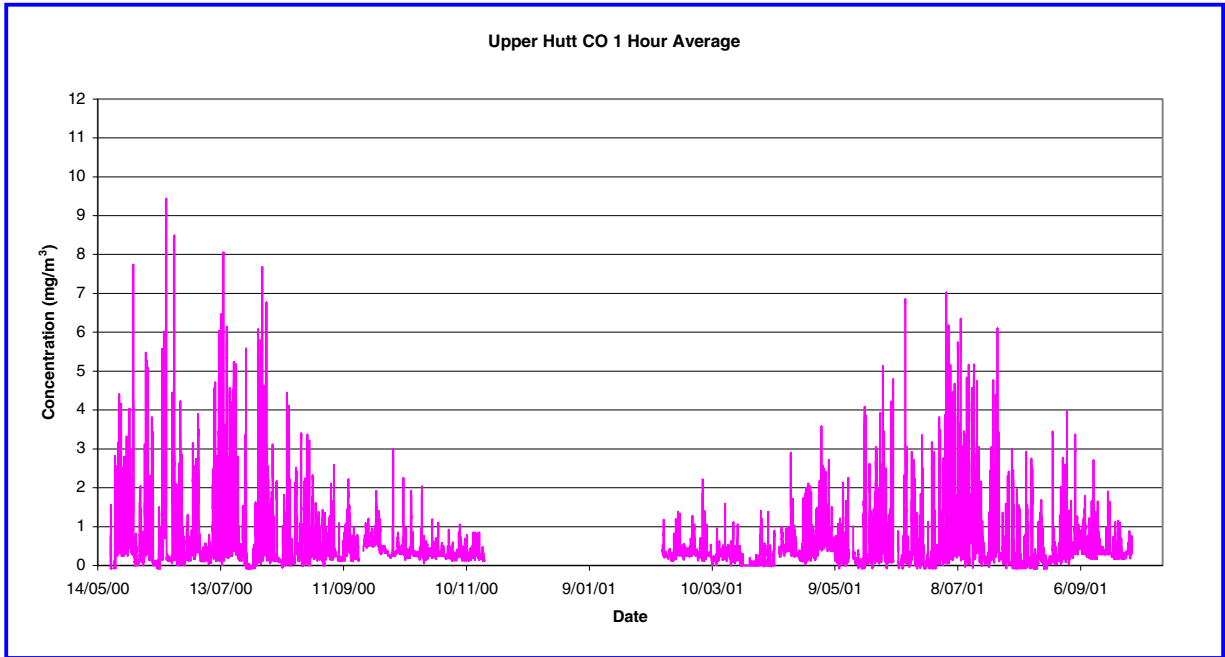


Figure 4.11 1-Hour Moving Average CO (mg/m³) at Trentham Fire Station from 19/5/00 to 1/10/01

8-Hour Moving Average

Figure 4.12 is a graph of the 8-hour moving average of CO concentrations at Trentham Fire Station for the monitoring period. The graph also indicates the 8-hour maximum acceptable level (MAL) of 10 mg/m³ and the maximum desirable level (MDL) of 6 mg/m³.

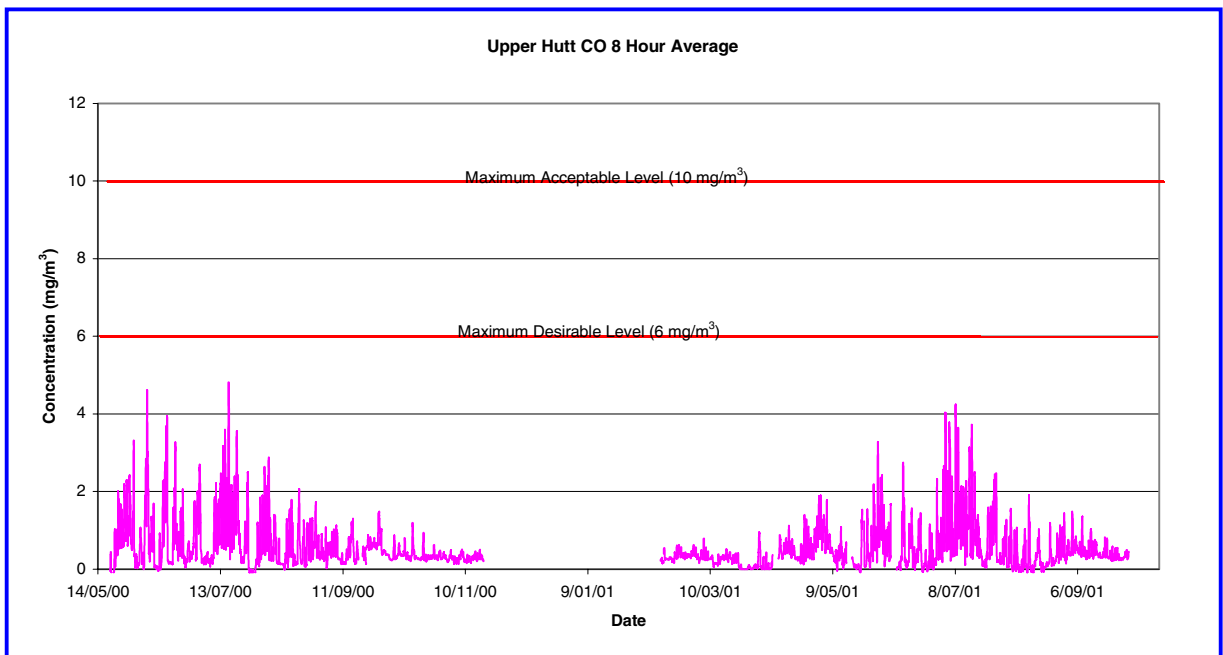


Figure 4.12 8-Hour Moving Average CO (mg/m³) at Trentham Fire Station from 19/5/00 to 1/10/00

Analysis of CO Monitoring Results

There were no exceedences of either the MAL or the MDL during the monitoring period. The peaks in CO are likely to be due to a combination of motor vehicle exhaust emissions and emissions from domestic solid fuel heating appliances.

Figure 4.13 illustrates the comparison of the monitoring results with the relative ambient air quality guidelines using the air quality categories described in Table 2.2.

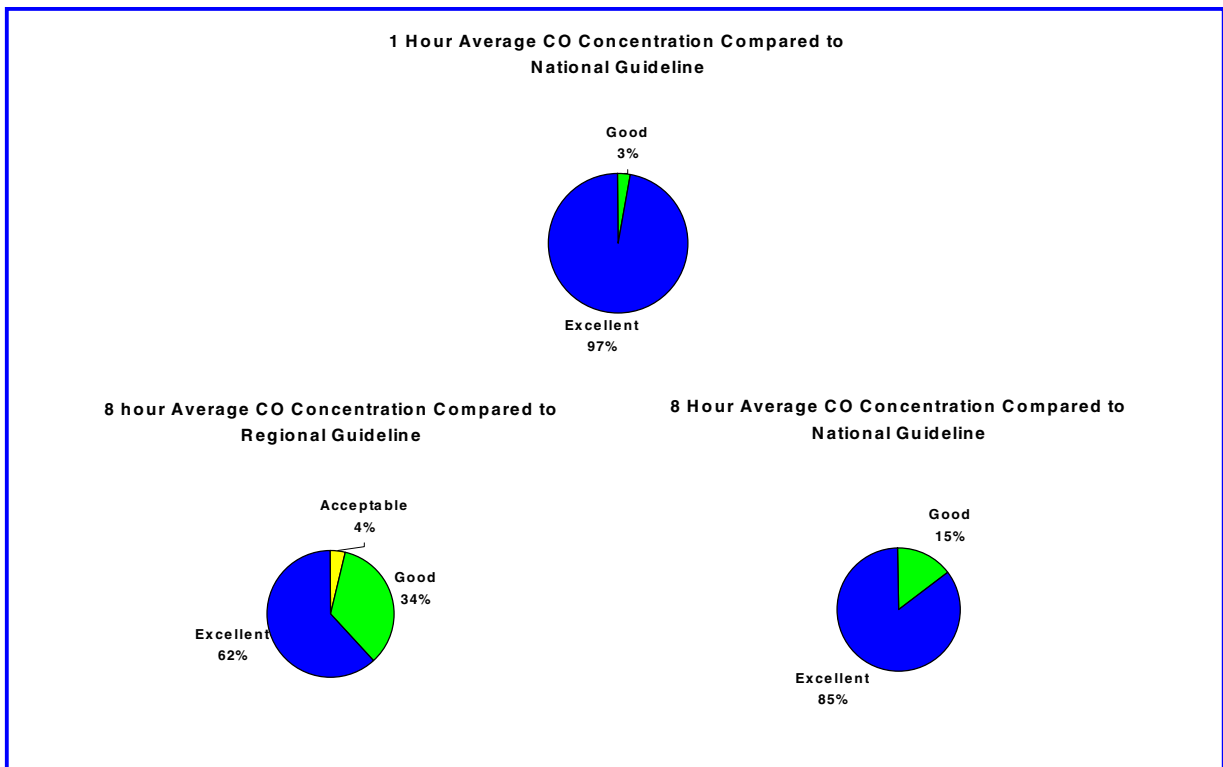


Figure 4.13 CO Monitoring Results Compared to Air Quality Categories for the Period June 2000 to October 2001

Overall, the levels of CO recorded during the monitoring period were not at concentrations that could be considered a concern to human health based on the current guidelines. However, it is desirable that average pollutant concentrations do not increase beyond the current levels over the long term because the land use around the monitoring site is mainly recreational and residential.

CO concentrations showed a variation similar to NO₂ and PM₁₀ with higher levels being recorded during the winter months.

4.2 Birch Lane, Lower Hutt

4.2.1 Site Description

The Birch Lane Air Quality Monitoring Station is located within the grounds of Phil Evans Reserve, off Birch Lane in Lower Hutt (Grid Reference E2671059; N5997570, elevation 15m). Figure 4.14 shows a map of the area and Figure 4.15 details the site layout. The Birch Lane site is the first permanent air quality monitoring station for the Wellington Region.

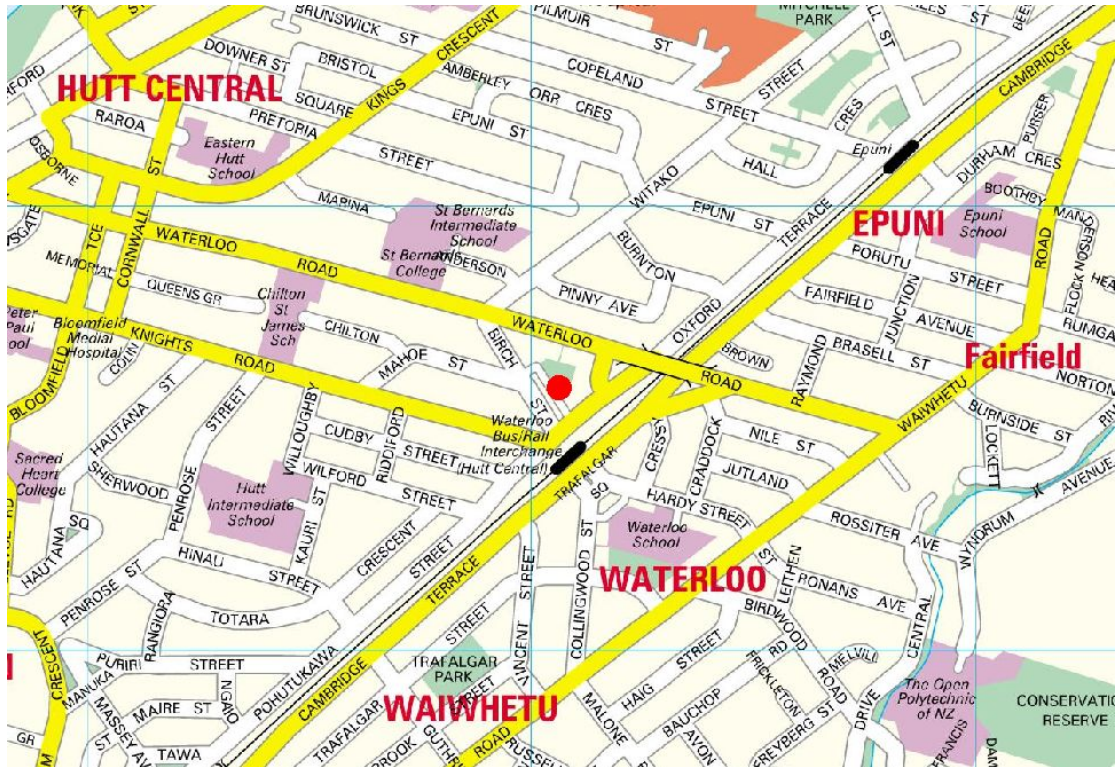


Figure 4.14 Map Showing Location of Monitoring Site (●)

The western side of the monitoring station is up against a one-storey building that serves as clubrooms for the local Scout Group. To the east, approximately 60m away, are a number of one-storey residential houses. 30m to the south are some one- and two-storey commercial buildings. To the north is an open grassed area that forms part of Phil Evans Reserve and beyond that are residential properties.

The land around the site at Birch Lane is flat and surrounded by open space or residential buildings. The nearest large structures to the monitoring station are some commercial buildings 50m to the south, these are up to two storeys high.

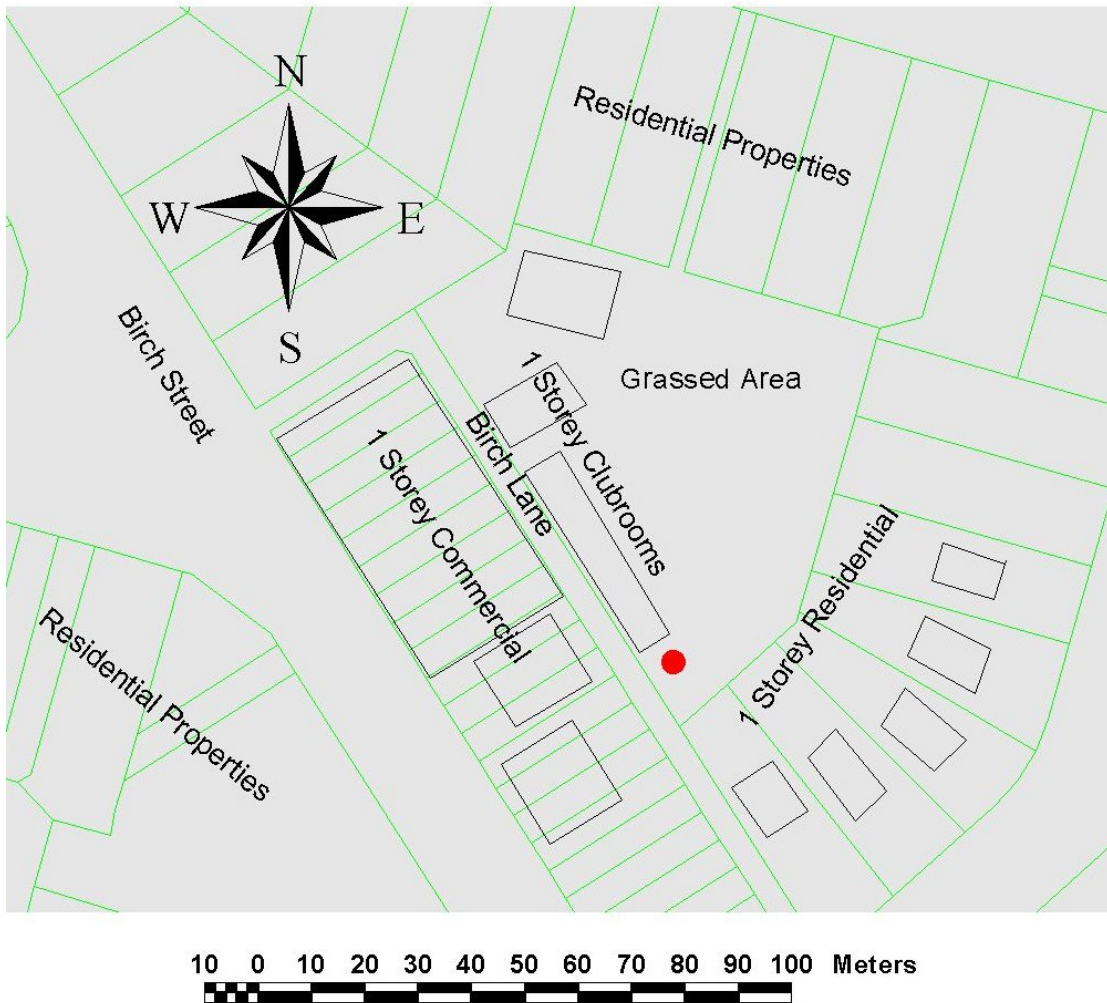


Figure 4.15 Monitoring Site (●) layout at Birch Lane, Lower Hutt

The Birch Lane site is approximately 1 kilometre east of the central business district of Lower Hutt City. Lower Hutt City has a population of about 100,000 and is located in lower reaches of the Hutt Valley 15km northeast of central Wellington. Land use in the area is predominantly residential with some light industrial activities. Three kilometres to the south of the central business district is the industrial area of Seaview where a number of light to medium scale industrial activities operate.

The main urban area of Hutt City lies in a valley basin with hills up to 500 metres high on either side. The Hutt River runs through the middle of Lower Hutt and discharges into Wellington Harbour. The Hutt Valley is about 5km wide where it meets Wellington Harbour. At times the atmospheric dispersion of air contaminants discharged from various activities in Lower Hutt is limited and can lead to a build up of air pollution.

Figure 4.16 shows an aerial view of the Lower Hutt Valley and the Hutt city urban area.

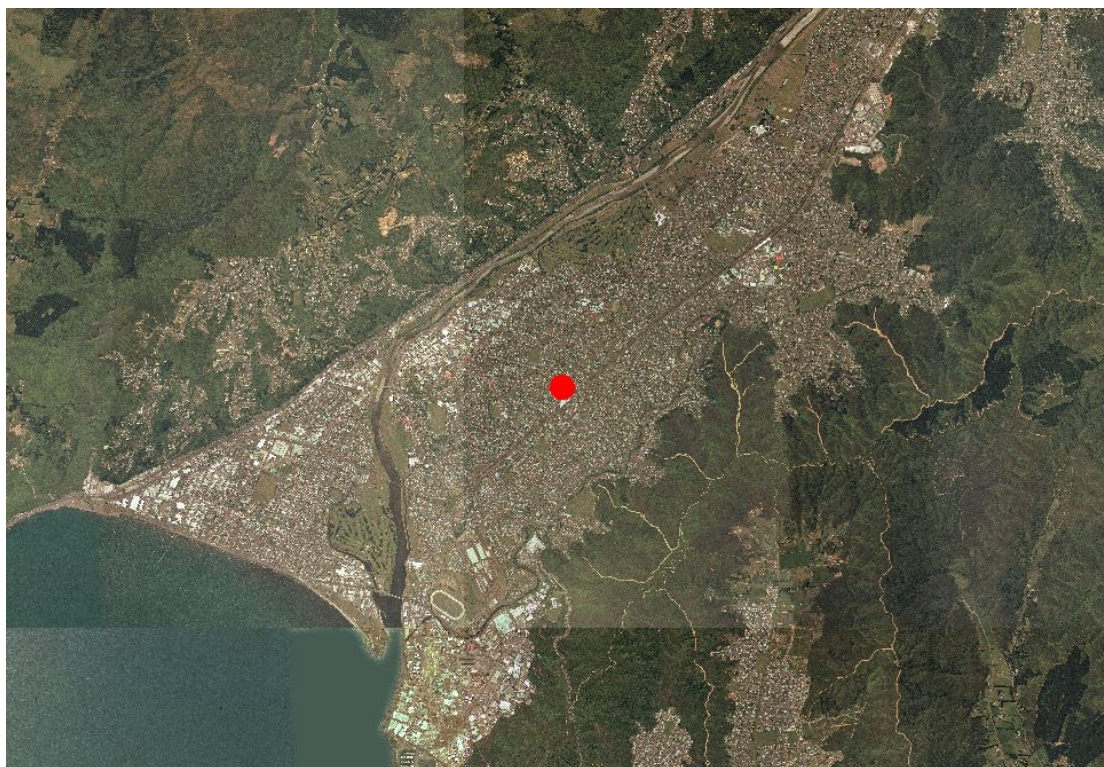


Figure 4.16 Aerial Photograph of Hutt City Urban Area and Monitoring Site (●)

The predominant wind directions at Lower Hutt are from the northerly and southerly quarters as shown by the wind rose in Appendix 2.

Table 4.2 contains summary statistics of guideline pollutants for the monitoring period. Also shown is the Maximum Desirable Level (MDL) or the Maximum Acceptable Level (MAL) where an MDL has not been set

Table 4.2 Summary Statistics for Birch Lane, Lower Hutt

Parameter	NO ₂ (µg/m ³)		PM ₁₀ (µg/m ³)	CO (mg/m ³)	
	1 Hour (MDL = 95)	24 Hour (MDL = 30)	24 Hour (MDL = 70)	1 Hour (MAL = 30)	8 Hour (MDL = 6)
Maximum	140	72	30	7.5	3.8
99.9 Percentile	122	71	29	6.5	3.7
99.5 Percentile	98	64	28	4.4	3.2
75 Percentile	28	26	17	0.8	0.8
Mean	20	20	14	0.7	0.7
Median	14	18	14	0.5	0.5
25 Percentile	7	11	11	0.3	0.3

4.2.2 Nitrogen Dioxide (NO₂)

1-Hour Moving Average

Figure 4.17 is a graph of the 1-hour moving average of NO₂ concentrations at Birch Lane for the monitoring period. Also shown is the 1-hour maximum acceptable level (MDL) of 95 µg/m³ for NO₂. The 1-hour maximum acceptable level (MAL) of 300 µg/m³ for NO₂ is not shown for scaling clarity.

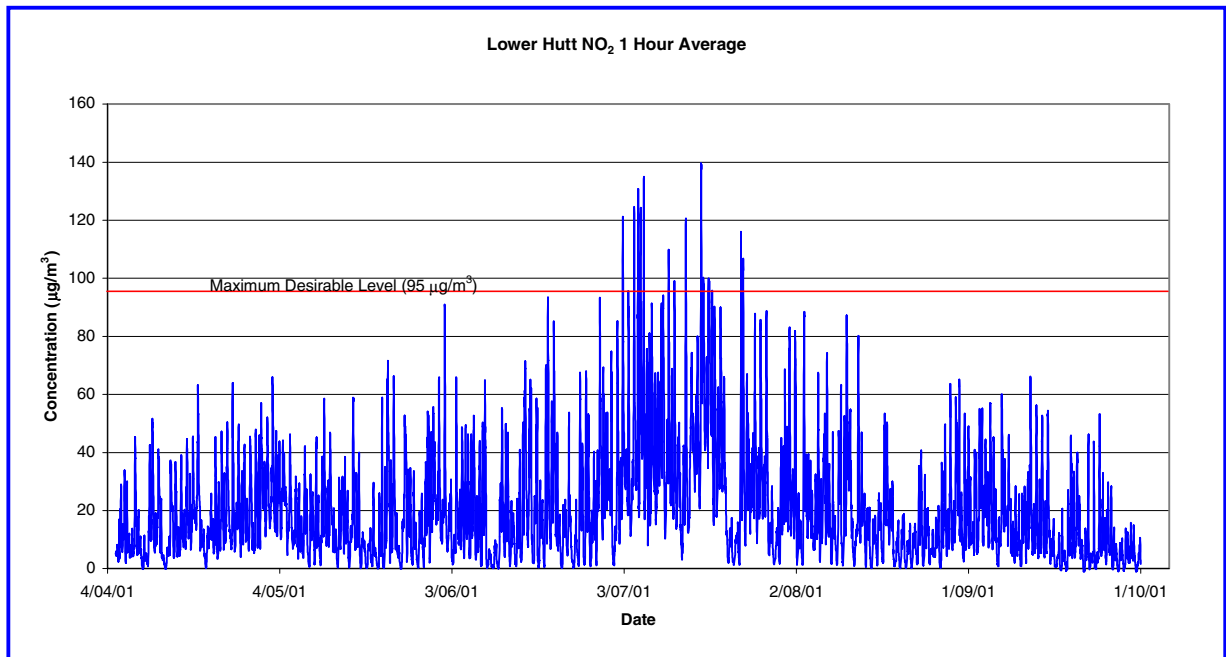


Figure 4.17 1-Hour Moving Average NO₂ (µg/m³) at Birch Lane from 5/4/01 to 1/10/01

24-Hour Moving Average

Figure 4.18 is a graph of the 24-hour moving average of NO₂ concentrations at Birch Lane for the monitoring period. The graph also indicates the 24-hour national ambient air quality guideline of 100 µg/m³ and the maximum desirable level (MDL) of 30 µg/m³.

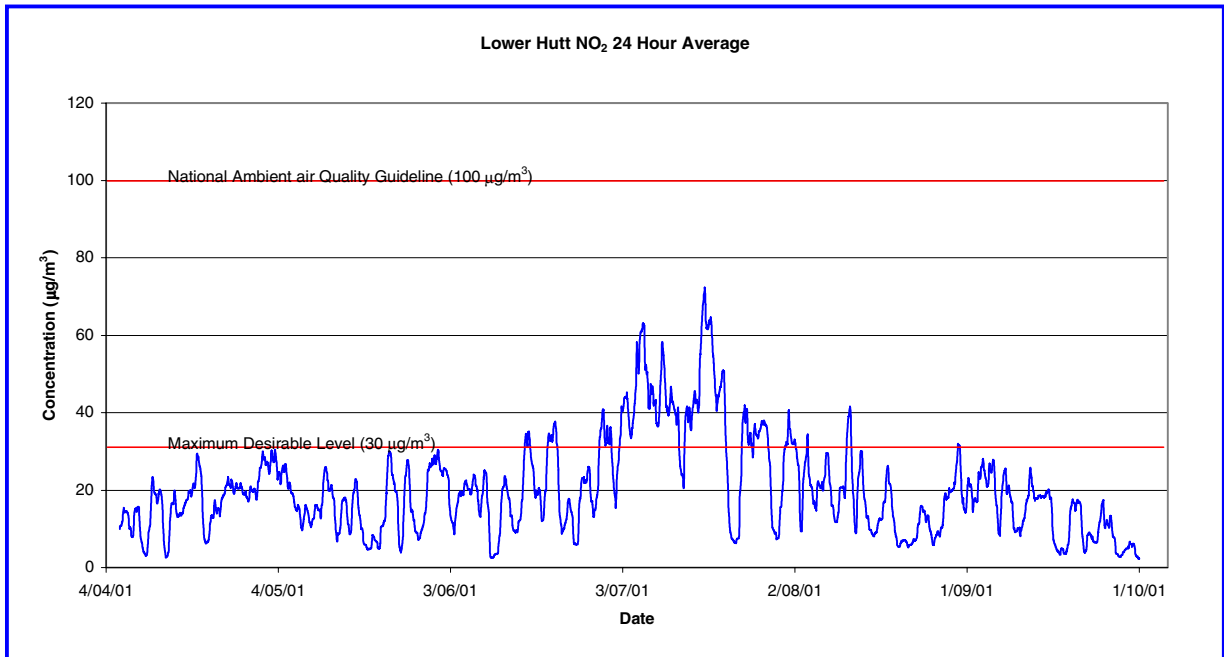


Figure 4.18 24-Hour Moving Average NO₂ (µg/m³) at Birch Lane from 19/5/00 to 1/10/00

Analysis of NO₂ Monitoring Results

There were a number of exceedences of the NO₂ 1-hour and 24-hour MDL of 95 and 30 µg/m³ respectively recorded during the monitoring period. All exceedences were recorded during the winter period

Closer analysis of the NO₂ data for Lower Hutt shows a diurnal pattern of peaks in NO₂ concentrations in the morning and again in the evening. This is likely to be as a result of motor vehicle emissions from heavier traffic in the morning and then again in the afternoon/evening associated with commuter 'rush hours'. There would also be some contribution to ambient NO₂ concentrations from domestic fires and residential and commercial gas heating during the winter.

Data from the Wellington Regional Emissions Inventory indicates that motor vehicles are the major contributor to NO₂ emissions on a typical winter's day.

Figure 4.19 provides a comparison of the monitoring results with the relative ambient air quality guidelines using the categories described in Table 2.2.

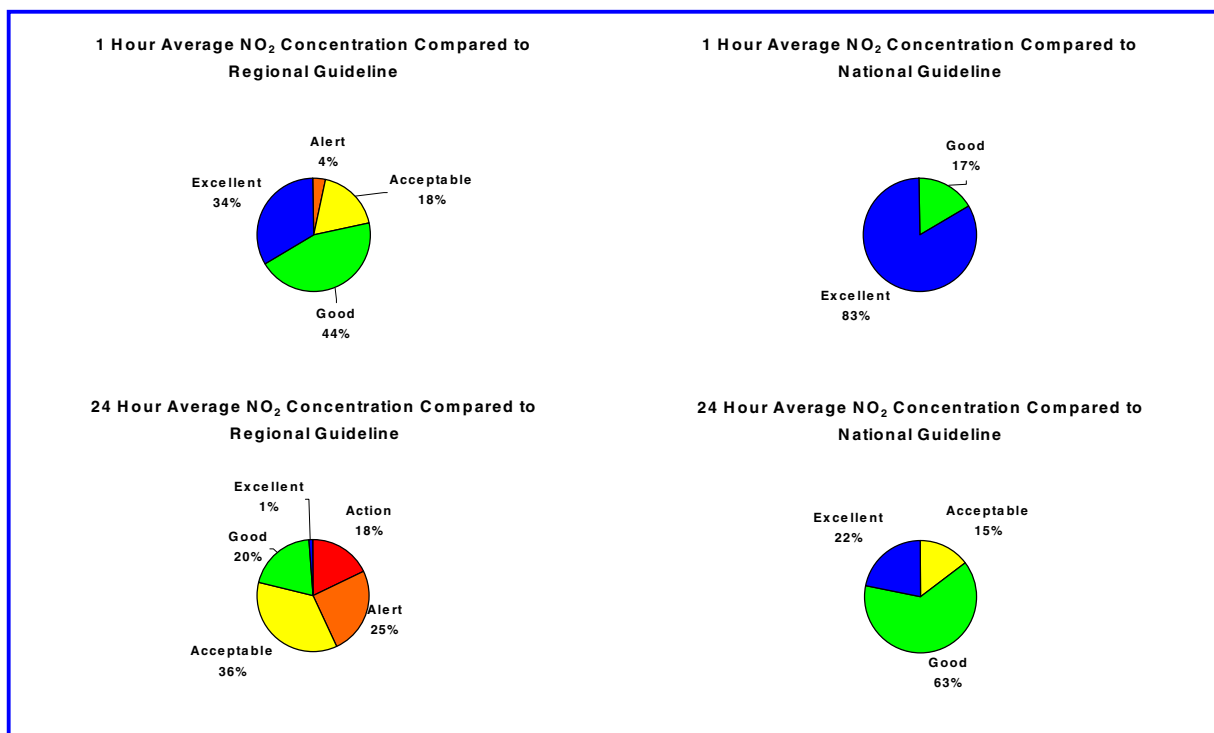


Figure 4.19 NO₂ Monitoring Results Compared to Air Quality Categories for the Period May 2000 to October 2000

Figure 4.19 indicates that the NO₂ monitoring results at Birch Lane compare favourably with the proposed National Air Quality Guidelines. NO₂ concentrations fell mainly into the alert to action categories for the 24-hour MDL. While it would appear that NO₂ concentrations do not currently pose a problem to human health, the exceedences of the MDL suggests that there may be some adverse effects for the wider environment, especially for sensitive ecosystems. Whether any of these adverse effects are significant or not, has yet to be determined.

4.2.3 Particulate Matter (PM₁₀)

1 Hour Moving Average

Figure 4.20 is a graph of the 1-hour moving average of PM₁₀ concentrations at Birch Lane for the monitoring period. There is no guideline value for 1-hour concentrations. Due to an instrument fault there is no data available on PM₁₀ levels in Lower Hutt for the past winter. As winter is the period when PM₁₀ concentrations tend to peak in the Wellington Region, little or no comparisons can be made with monitoring carried out elsewhere. The instrument fault has been rectified and everything is now operating normally.

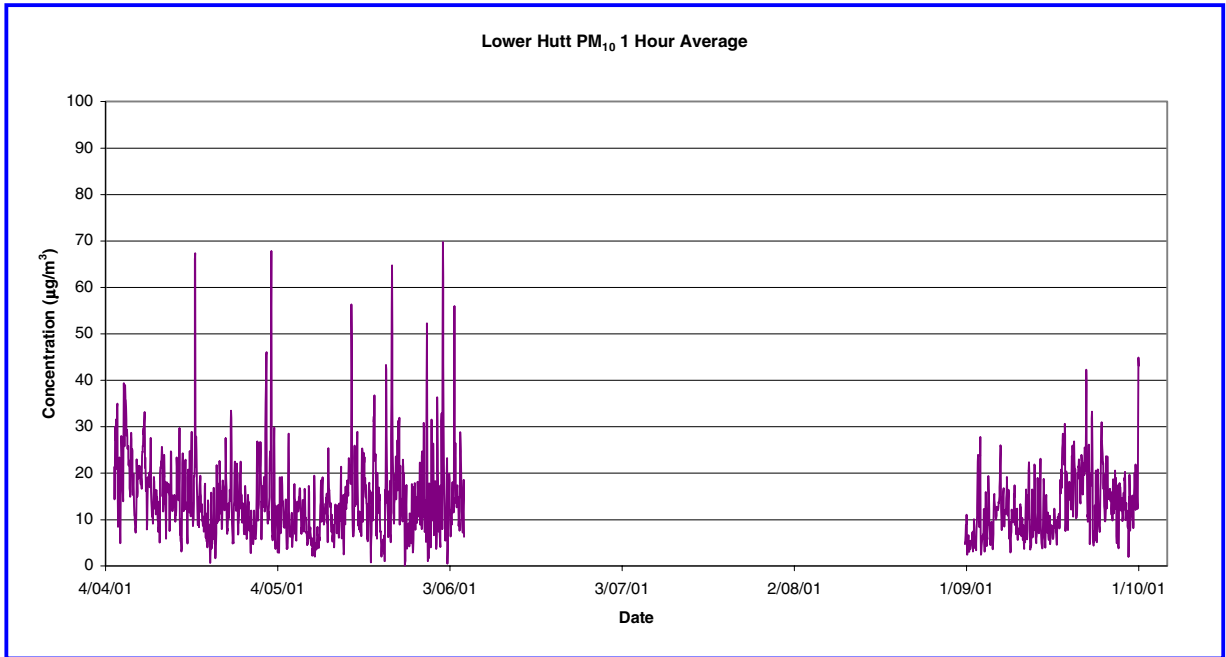


Figure 4.20 1 Hour Moving Average PM₁₀ (µg/m³) at Birch Lane from 5/4/01 to 1/10/01

24-Hour Moving Average

Figure 4.21 is a graph of the 24-hour moving average of PM₁₀ concentrations at Birch Lane for the monitoring period. The graph also indicates the 24-hour maximum acceptable level (MAL) of 120 µg/m³ and the maximum desirable level (MDL) of 70 µg/m³.

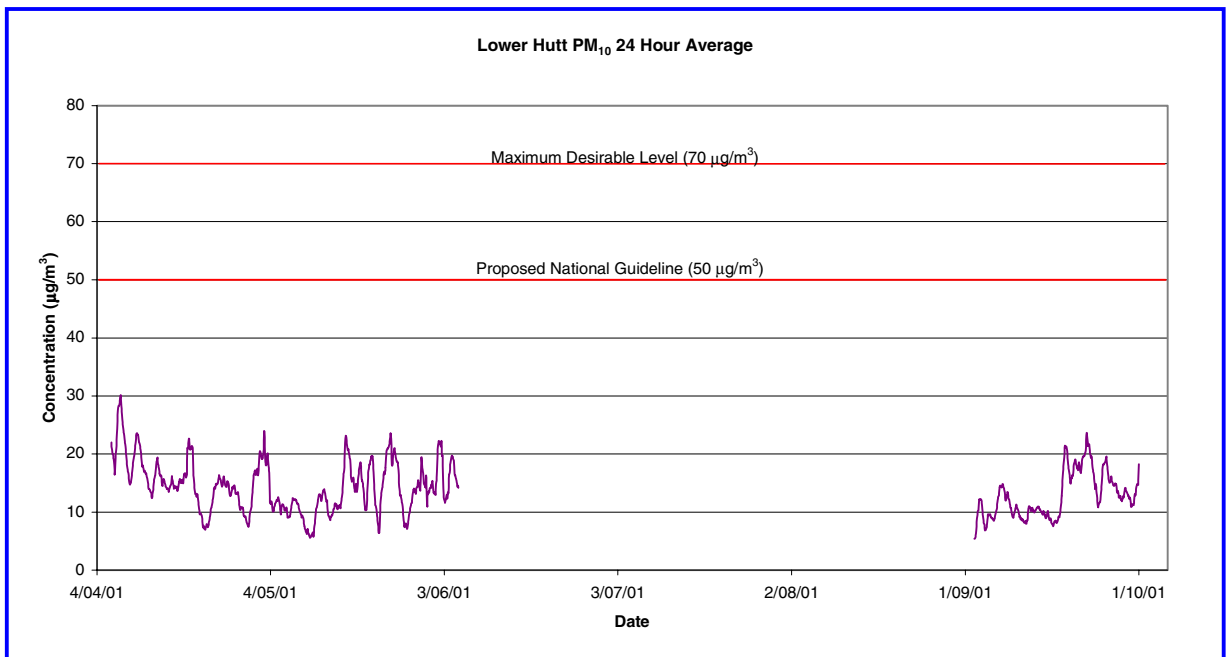


Figure 4.21 24-Hour Moving Average PM₁₀ (µg/m³) at Birch Lane from 22/5/00 to 1/10/00

Analysis of the NO₂ and CO data would suggest that PM₁₀ levels at Lower Hutt can be expected to be elevated during the winter. Whether any guidelines are exceeded or not will have to wait until further monitoring is undertaken.

Analysis of PM₁₀ Monitoring Results

Figure 4.22 shows of the monitoring results compared with the relevant ambient air quality guidelines using the air quality categories described in Table 2.2, and with the proposed new National Air Quality Guideline for PM₁₀ (50 µg/m³).

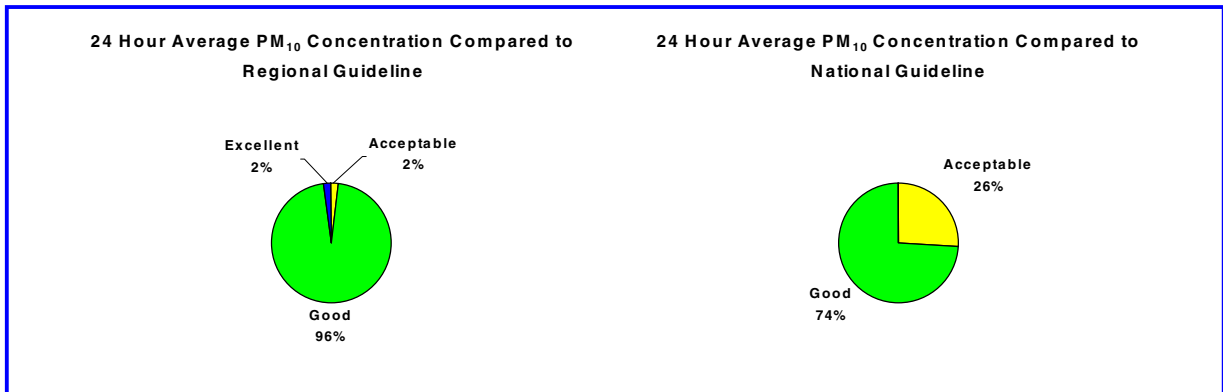


Figure 4.22 PM₁₀ Monitoring Results at Lower Hutt Compared to Air Quality Categories for the Period April 2001 to October 2001

Care must be taken in interpreting the data at this point as no monitoring was carried out during the winter.

4.2.4 Carbon Monoxide (CO)

1-Hour Moving Average

Figure 4.23 is a graph of the 1-hour moving average of CO concentrations at Birch Lane for the monitoring period. The 1-hour maximum acceptable level (MAL) of 30 mg/m³ for CO is not shown for scaling clarity.

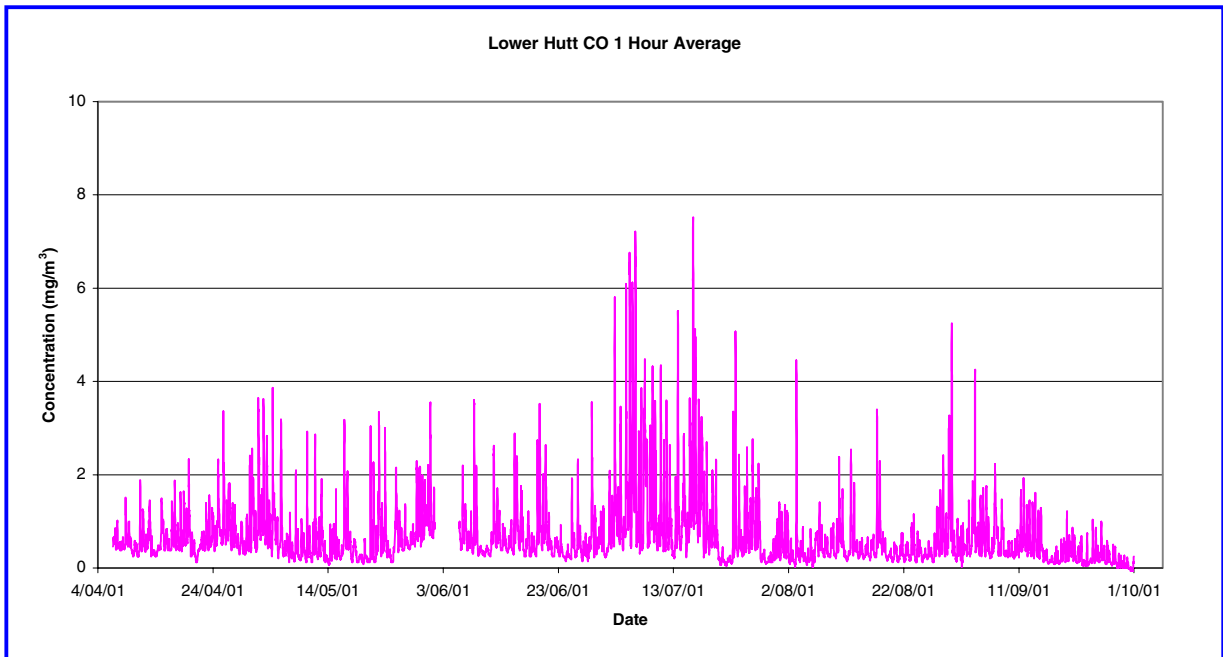


Figure 4.23 1-Hour Moving Average CO (mg/m³) at Birch Lane from 5/4/01 to 1/10/01

8-Hour Moving Average

Figure 4.24 is a graph of the 8-hour moving average of CO concentrations at Birch Lane for the monitoring period. The graph also indicates the 8-hour maximum acceptable level (MAL) of 10 mg/m³ and the maximum desirable level (MDL) of 6 mg/m³.

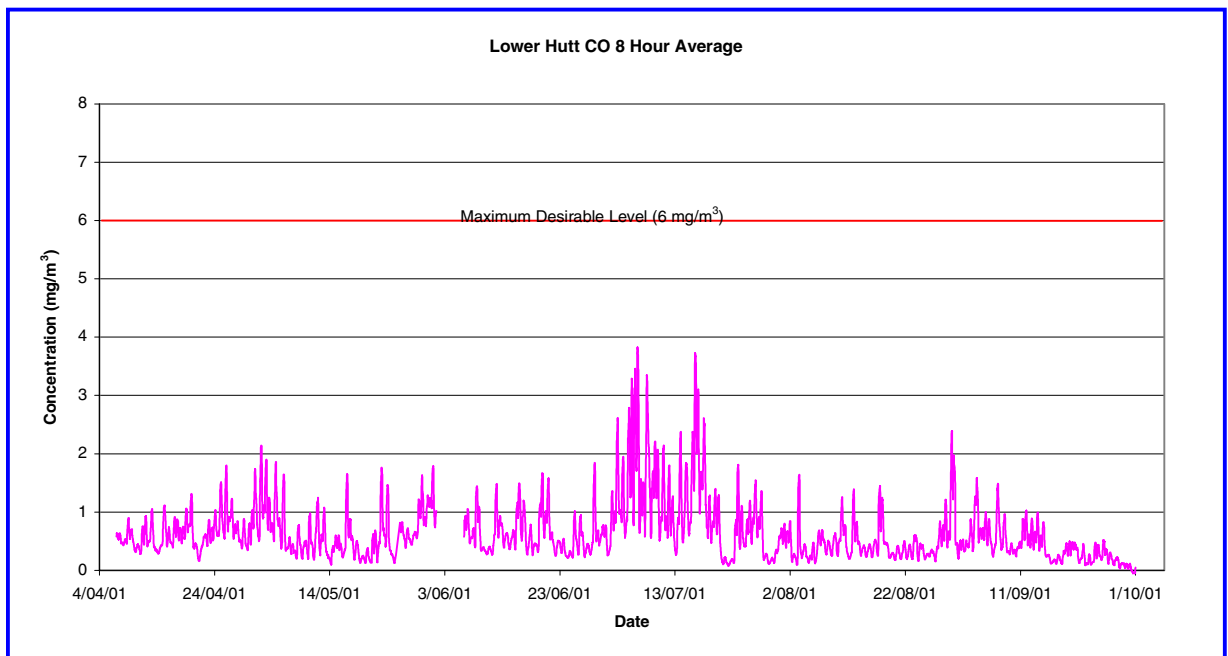


Figure 4.24 8-Hour Moving Average CO (mg/m³) at Birch Lane from 5/4/01 to 1/10/01

Analysis of CO Monitoring Results

There were no exceedences of either the MAL or the MDL during the monitoring period. CO levels peaked at a concentration of 2.8 mg/m³ at 11:20am on 6/7/01 for the previous 8 hours. This occurred after a cold calm night indicating that there was a significant temperature inversion present effectively trapping pollutants and enabling local ambient concentrations to build up.

The peaks in CO are likely to be due to a combination of motor vehicle exhaust emissions and emissions from domestic solid fuel heating appliances. Figure 4.25 illustrates the comparison of the monitoring results with the relative ambient air quality guidelines using the air quality categories described in Table 2.2.

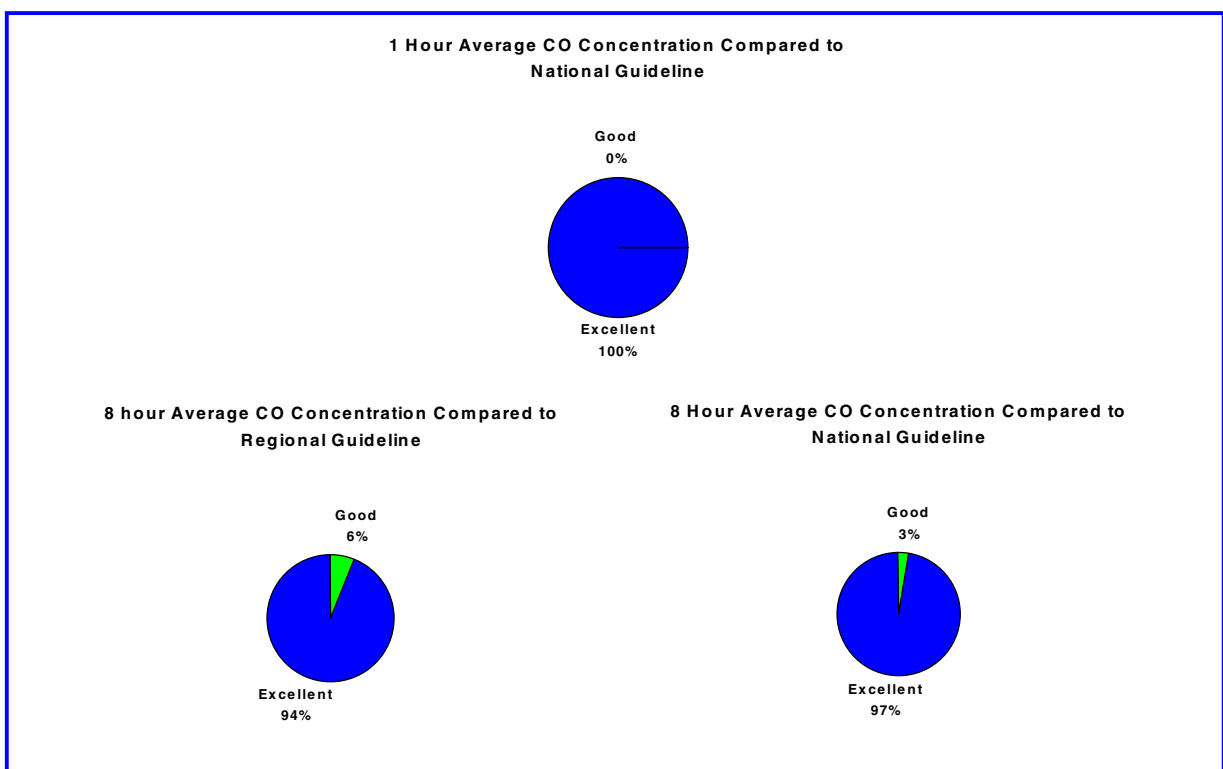


Figure 4.25 CO Monitoring Results Compared to Air Quality Categories for the Period June 1999 to October 1999

Overall, the levels of CO recorded during the monitoring period were not at concentrations that could be considered a concern to human health based on the current guidelines. However, it is desirable that average pollutant concentrations do not increase beyond the current levels over the long term because the land use around the monitoring site is mainly recreational and residential.

CO concentrations showed a variation similar to NO₂ with higher levels being recorded during the winter months. The concentrations of both pollutants tended to peak at the same time, indicating that they are likely to be from the same sources.

4.3 Wainuiomata PM₁₀ Monitoring

4.3.1 Site Description

A high volume sampler has been located at the Wainuiomata Bowling Club in Wainuiomata since 20 September 2000. (NZMS Grid Reference E2673668; N5991398, elevation 80m). The instrument is currently operating on a one-day-in-four sampling regime.

The sampler is located on a flat area of land at the Wainuiomata Bowling Club. Figures 4.26 and 4.27 show the site location and the site layout respectively.

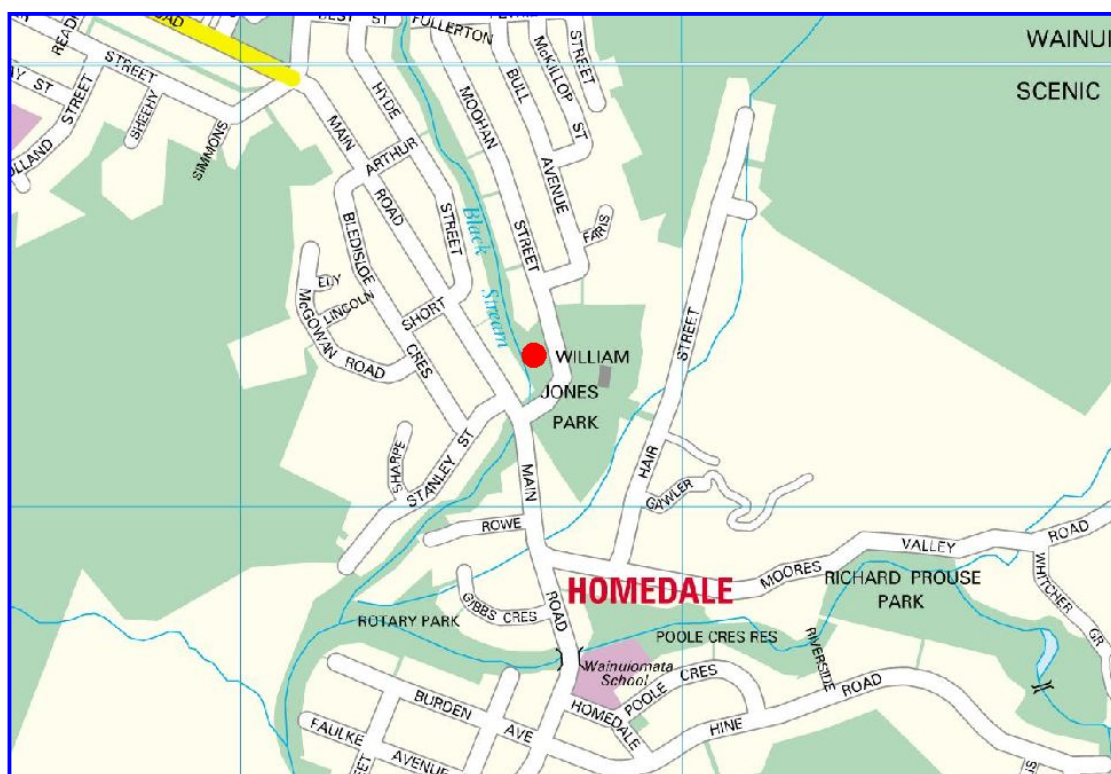


Figure 4.26 Location of Wainuiomata Site (●)

The Wainuiomata Bowling Club site lies approximately 1km southeast of the main shopping centre. Wainuiomata has a population of about 16,500. The Wainuiomata valley is located east of the Hutt Valley and 20km northeast of central Wellington. The predominant land use around the site is residential with some adjacent recreational activities such as a swimming pool complex and rugby fields.

Wainuiomata lies in a basin shaped valley that has a narrow exit at the southern end through which the Wainuiomata River flows. The valley is surrounded by hills that are 300m high to the west, 600m high to the north and 800m high to the east. During the winter the valley is subject to frosts and meteorological inversion conditions. Many residential dwellings use solid fuel fires as a source of heating in the winter.

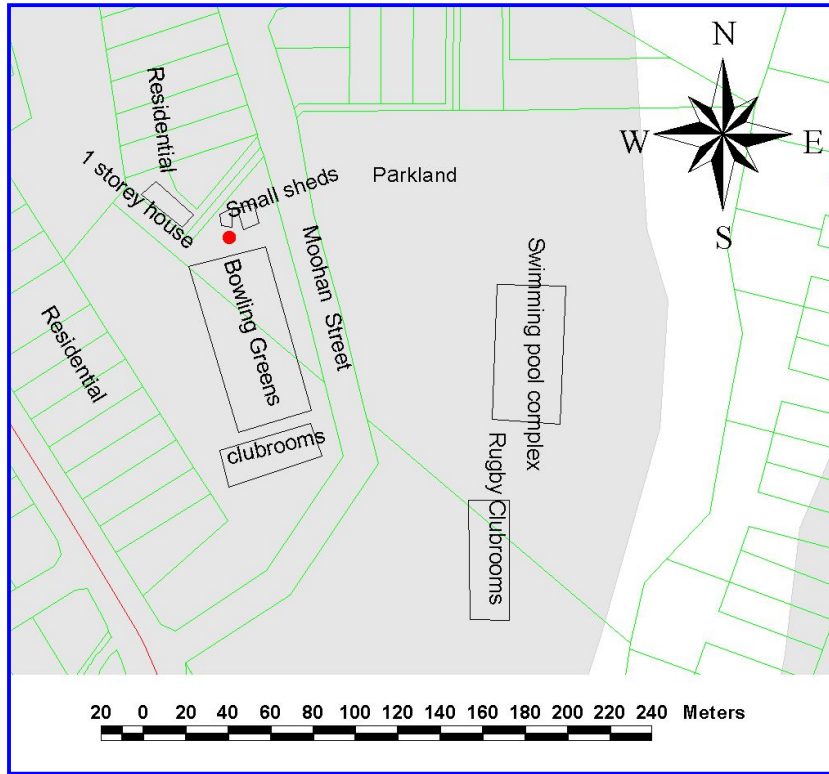


Figure 4.27 Site Layout at Wainuiomata and Hi-vol Location (●)

Figure 4.28 is an aerial photograph of the Wainuiomata urban area and the monitoring site location.

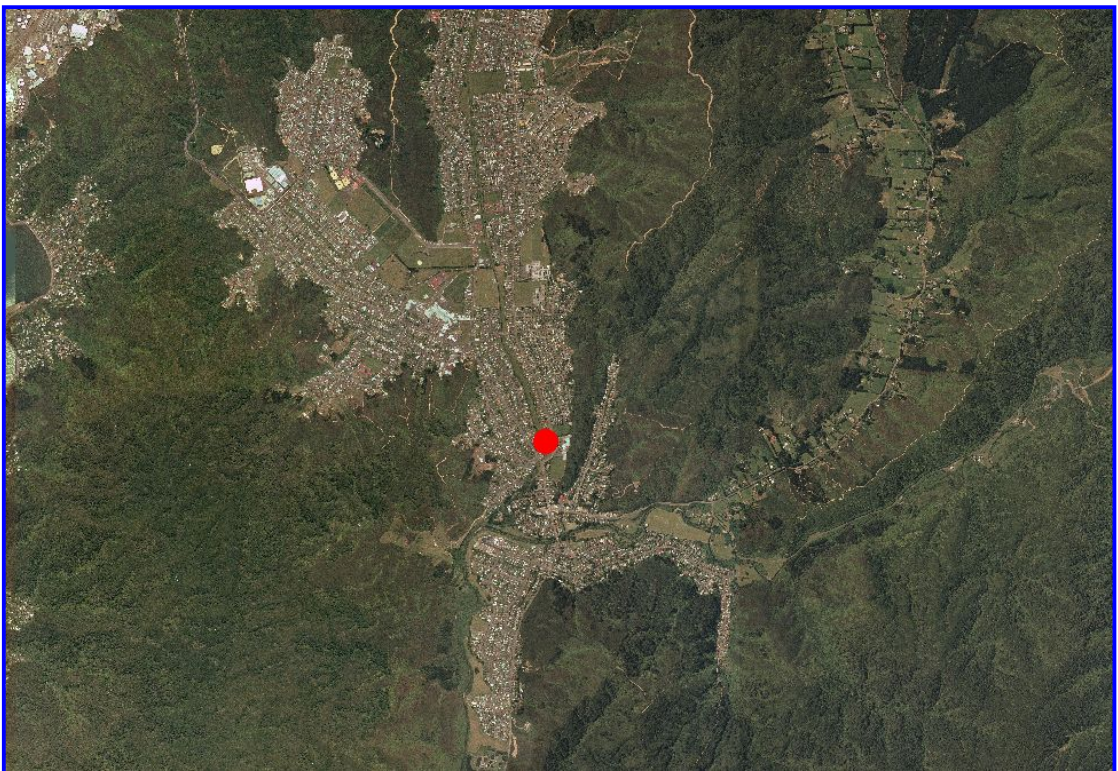


Figure 4.28 Aerial Photo of Wainuiomata Urban Area Showing Site Location (●)

Technical Parameters and Meteorology

The high volume sampler is a gravimetric method for monitoring PM₁₀. Ambient air is passed through a size selective inlet and then through a pre-weighed filter that is removed after 24 hours of continuous sampling of ambient air at 70 m³/hr and then reweighed. The results are expressed as the 24 hour average for that time period. The 24-hour monitoring period used for this study was 12:00 to 12:00 the following day. The high volume sampler is an Australian and USEPA Standard method.

The nearest meteorological station is at Shandon Golf Club, Lower Hutt which is approximately 5 km west of this site. Wainuiomata is predominately affected by northerly and southerly winds. Wind direction at the sampling site would have been similar to that experienced at Shandon Golf Club, however, wind speed and temperature would vary somewhat as the Wainuiomata Valley is decoupled from the Hutt Valley by a range of hills 300m high.

4.3.2 Monitoring Results for PM₁₀ at Wainuiomata

Figure 4.29 shows the discrete results for each 24 hour period monitored by the high volume sampler.

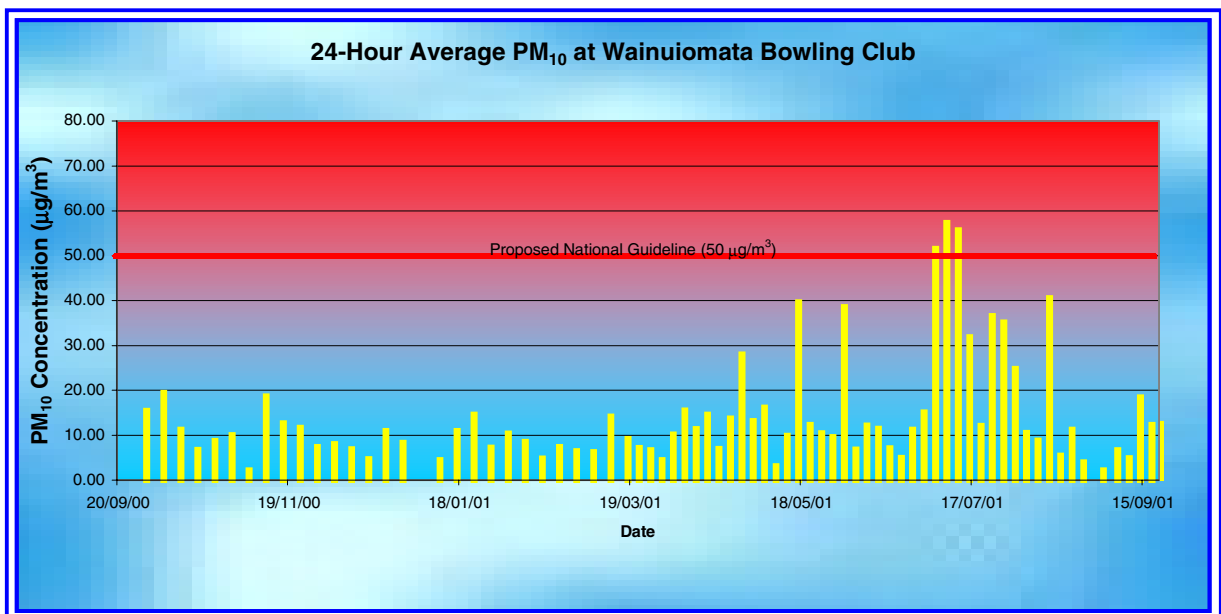


Figure 4.29 24-Hour Average PM₁₀ at Wainuiomata Bowling Club from 20 September 2000 to 1 October 2001

Table 4.3 Statistical Summary of PM₁₀ Monitoring Data at Wainuiomata

Parameter	PM ₁₀ (µg/m ³)
Averaging Time	24 Hour (MDL = 70 NAAQG=50)
Maximum	57
99.9 Percentile	57
99.5 Percentile	56
95 Percentile	40
75 Percentile	14
Mean	14
Median	10
25 Percentile	7

The maximum 24-hour average PM₁₀ concentration measured was 57 µg/m³ for the 24 hour period ending at 12:00 on 4 July. This was one of three exceedences of the proposed National guideline for PM₁₀ of 50µg/m³ during the monitoring period. All exceedences occurred in early July when there was a sustained spell of cold calm weather in Wellington. Similar air pollution levels were recorded at the Upper Hutt monitoring site in early July. Concentrations of particulate matter during the summer were found to be generally low.

4.3.3 Analysis of PM₁₀ Monitoring Results

The Wellington Regional Council used the Wainuiomata site as part of an air pollution screening programme for the Wellington Region. Wainuiomata had been suspected of having the meteorological conditions conducive to pollution events. The use of solid fuel fires for domestic heating is suspected as the main source of air pollution.

There were no exceedences of the MDL of 70 µg/m³ but the proposed National Guideline of 50 µg/m³ was exceeded on three occasions. It is possible that other days where PM₁₀ was also high were missed as the monitoring programme uses a one-day-in-four sampling regime. Longer term monitoring is recommended in Wainuiomata to establish annual trends in particulate concentrations.

Figure 4.30 provides a comparison of the monitoring results with the relative ambient air quality guidelines using the assessment categories described in Table 2.2

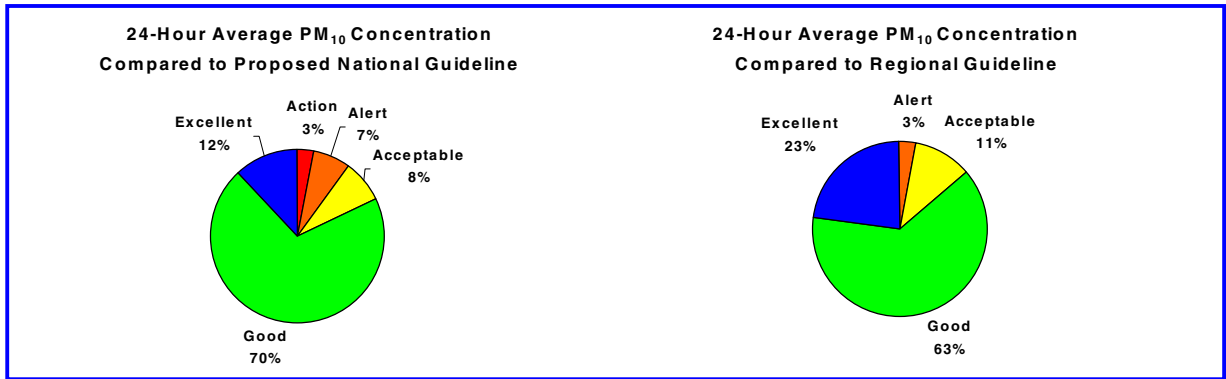


Figure 4.30 PM₁₀ Monitoring Results Compared to Air Quality Categories for the Period, September 2000 – October 2001

The higher results suggest there are be some air quality issues and potential for adverse human health effects in Wainuiomata during the winter. The likely sources of particulate pollution are domestic fires.

5. Conclusion

The results of the ambient air quality monitoring carried out in the Wellington Region over the past year (and in previous years) have indicated that the highest concentrations of air pollutants generally occurred during the winter. The reasons for the higher winter time air pollution levels are periods of cold, calm weather when pollutant concentrations increase in the local air mass rather than being dispersed, coupled with a greater quantity of emissions to atmosphere from combustion sources used for residential and commercial heating.

It is important to note that it is difficult to draw conclusions on the state of the air environment at a particular location based upon short-term monitoring. The following generalised comments must be treated with caution as only long term monitoring can assess air quality under a wide range of meteorological conditions and seasonal change.

Upper Hutt

A mobile ambient air quality monitoring station has been located at Trentham Fire Station in Upper Hutt since June 2000. The entire period from June 2000 through to October 2001 has been reported in this document to allow comparisons between the winters of 2000 and 2001. The monitoring data confirms that the Upper Hutt area is susceptible to wintertime pollution episodes.

There were four exceedences of the proposed new National Air Quality Guideline for particulate matter during the last winter and two exceedences during the previous (2000) winter. Carbon monoxide and nitrogen dioxide concentrations were also found to be higher during the winter. It is suspected that domestic fires are the main cause of the particulate pollution and a combination of motor vehicles and domestic fires are responsible for the elevated levels of carbon monoxide and nitrogen dioxide. Further research is being undertaken to establish the predominant pollution sources in Upper Hutt.

Lower Hutt

The Council's first permanent ambient air quality monitoring station was commissioned at Birch Lane in Lower Hutt in February 2001. This is the first in a network of air quality monitoring stations intended for the Wellington Region. Monitoring results for the period from February 2001 through to October 2001 has been reported in this document.

The results indicate that nitrogen dioxide levels are elevated during the winter in Lower Hutt, this is likely to result from motor vehicle emissions and combustion emissions from residential and commercial heating, combined with cold calm conditions. Peak levels occurred at similar times as those recorded at Upper Hutt. Unfortunately, due to instrumentation failure, PM₁₀ at Birch Lane was unable to be monitored over the winter and therefore no comparison can be made with peak particulate pollution levels at Upper Hutt and Wainuiomata. The problem has now been rectified.

Wainuiomata

PM₁₀ was monitored at Wainuiomata Bowling Club from September 2000 through to October 2001. Fine particulate concentrations exceeded the proposed National ambient air quality guideline on three occasions during the past winter. The breaches of the guideline occurred during the same period as those exceedences experienced in Upper Hutt, that is, during cold calm weather conditions when dispersion of air pollutants is poor.

The Wellington Regional Council used the Wainuiomata site as part of an air pollution screening programme for the Wellington Region. Wainuiomata had been suspected of having the meteorological conditions conducive to pollution events. The use of solid fuel fires for domestic heating is suspected as the main source of air pollution.

References

Ministry for the Environment, October 1997. *Environmental Performance Indicators: Proposals for Air, Fresh Water and Land*

NIWA, June 1995. *National Ambient Air Quality Monitoring Network for New Zealand*
NIWA Report AK95001

Ministry for the Environment, 1994. *National Ambient Air Quality Guidelines*

Ministry for the Environment, December 2000. *Proposals for Revised and New Ambient Air Quality Guidelines*


Ministry for the Environment, December 2000. *Good Practice Guide for Air Quality Monitoring and Data Management*

Wellington Regional Council, February 2001, *Elemental Composition and Source Apportionment of Particulate Matter in the Wellington Region* Wellington Regional Council Technical Report WRC/RINV-T-01/08.

Wellington Regional Council, June 2000 *Wellington Regional Air Quality Monitoring Strategy 2000-2005* Wellington Regional Council Technical Report WRC/RINV-T-00/20.

Appendix 1

Wind Rose for the Monitoring Period at Trentham Fire Station, Upper Hutt.

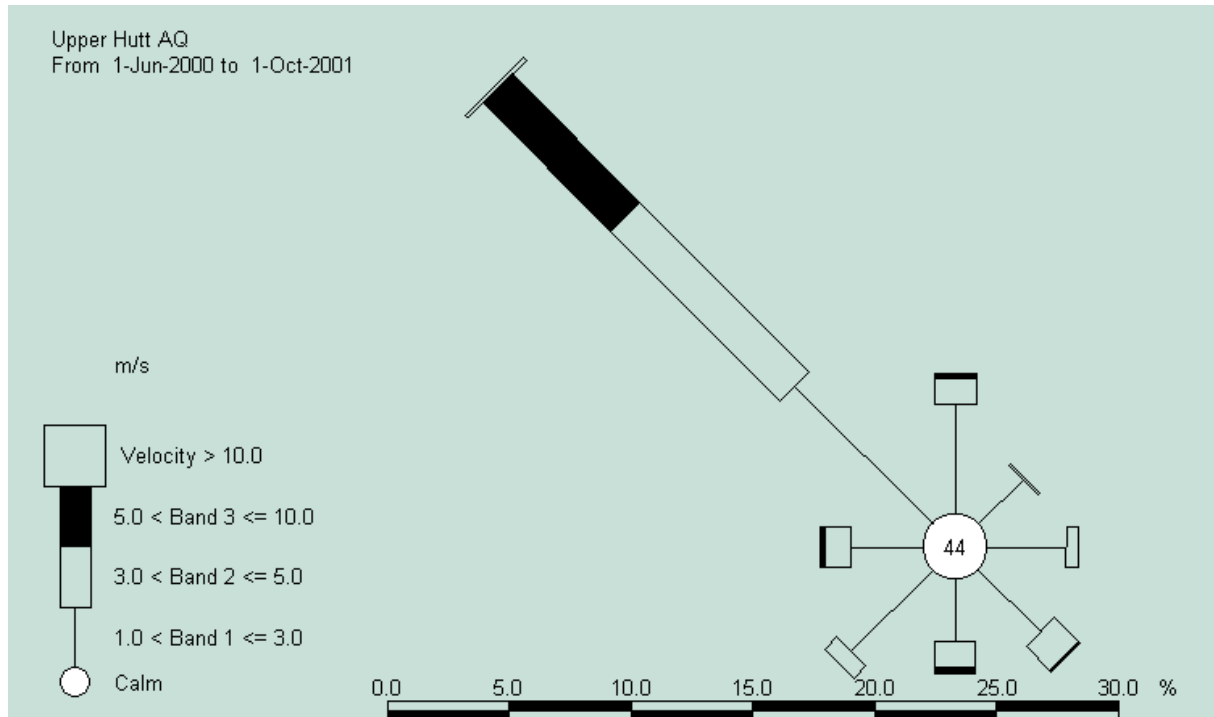

Appendix 2

Wind Rose for the Monitoring Period at Birch Lane, Lower Hutt.

